



UNDERLAY – TOOLS – ACCESSORIES

ASSORTMENT OVERVIEW



We will improve your floor



best base





Welcome

Welcome to Estillon, the specialist in underlays! We produce and supply a suitable underlay for every situation. Choosing the right underlay is not always easy. The range is large and there are many factors to consider. Such as equalization, noise reduction and underfloor heating.


This catalog will help you find the right underlay for your project or installation, along with a range of tools, accessories and profiles. After all, good tools are half the work!



Content

Who is Estillon	4-5
Our brands	6-7
Our solutions	8-9
Green Choice / Sustainability	10-11
Hospitality collection & IMO	12-13
Systemfloors	14-23
LVT Dryback LVT Click LVT Rigid carpet carpet tiles vinyl linoleum parquet laminate cork	
Underlays for carpet	24-56
carpet carpet tiles	
Underlays for hard flooring	57-77
LVT Click LVT Rigid vinyl linoleum parquet laminate ceramic tiles	
Tools and accessories	78-127
Support page	128



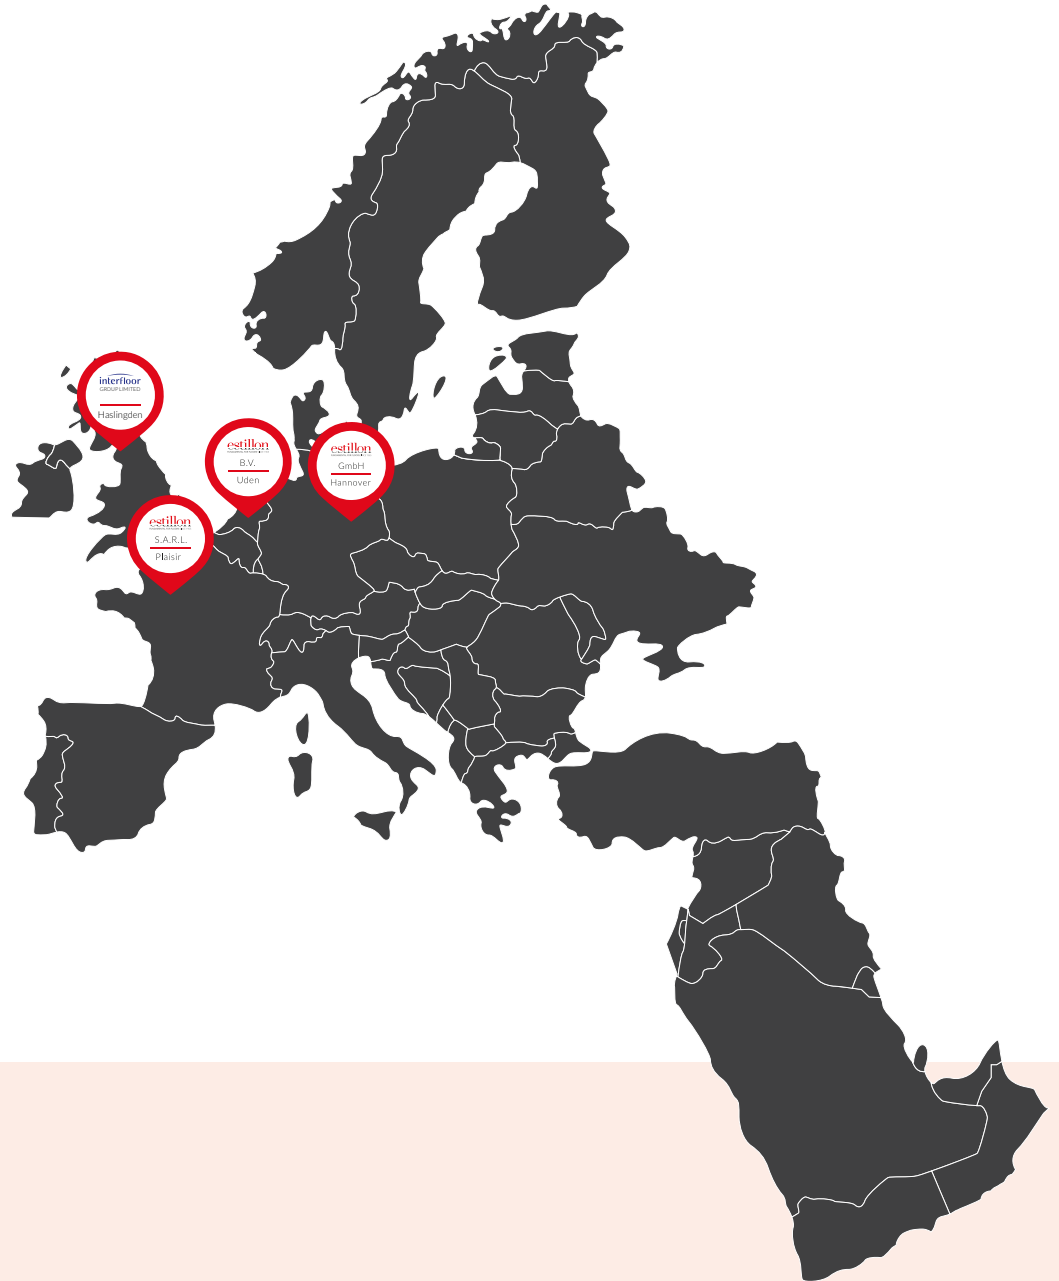

Who is Estillon?

We are Estillon, the specialist in underlays! With more than 50 years of experience in development, advice and production of carpet underlays, subfloors and accessories, we have a leading position in the market. Thanks to the development of various innovative products and installation techniques, we offer a complete range of underlays for all types of floor covering.

With a worldwide network of agents, resellers and an experienced full-service sales team, we provide you with the best possible service. From our centrally located warehouse in Uden (NL), we deliver to various wholesalers, retail chains and project designers. As part of the Interfloor Group Ltd, a subsidiary of Victoria plc. Estillon is the face of Interfloor in mainland Europe. We also have two sales offices in France and Germany, and we deliver to more than fifty countries. Through years of experience in project design, such as hotels, casinos, theaters, office design and even cruise ships, we are a specialist in this field!



floorfixx
made in Holland by estillon

best base

EGALSOFT
CARE FOR CARPETS

ROBERTS™

Floorfixx

With the Floorfixx system you can easily create a new, insulating and flat underlay in a dry way. In addition, these underlays are also immediately loadable. Because no wet leveling is used. Floorfixx is time-saving, simple and clean.

Best Base

The Best Base collection is a range of carpet underlays that are produced in an environmentally friendly way. The range is produced from high quality clean recycled rebond polyurethane foam. The lightweight foam ensures a stable, durable installation and enhances the experience of luxury and comfort of the carpet.

Egalsoft

Egalsoft® is an unique anti-slip underlay that provides a durable and easy installation. The carpet underlay is an impregnated nonwoven with an anti-slip equipment. Egalsoft® is applicable for both domestic and commercial installation. You will notice the advantage of Egalsoft during installation: this underlay not only saves you liters of glue, but also a lot of working time. It is a quick to install.

Roberts

Don't you also like to use the right tools when installing a floor and a subfloor? After all, good tools are half the work! This certainly applies to

Our Brands

We produce and distribute leading brands in the underlay market. Our renowned brands: Floorfixx, Best Base, Egalsoft and Roberts go all over the world and are known for their excellent performance and quality.

tredaire
It's what's underneath that counts

Duralay
Underlay Experts Since 1952

the preparation of installing floor coverings. For example, every type of floor covering requires specialist tools. Estillon has professional Roberts tools and accessories in its range for all those different types of floor covering.

Estillon is part of interfloor group limited.

Interfloor LTD is Europe's largest manufacturer of carpet underlays and floor accessories. Interfloor was created from the merger of Tredaire and Duralay in 2002. However, its origins date back to the 1940s when Duralay started producing the UK's first carpet underlays.

Tredaire

The Tredaire underlays are known for their comfort and quality. The highly regarded Tredaire range is available in crumb rubber, sponge rubber, PU foam and polyurethane for various types of floors, including those with underfloor heating.

Duralay

Duralay underlays do not compromise on comfort or durability. The crumb rubber, foam and sponge rubber underlays are perfect for high traffic commercial areas. Duralay also performs excellently when used with wood floors, laminate floors and underfloor heating.

Our Solutions



Comfort

We have various underlays that will guarantee you a feeling of comfort and luxury.



Longer life span

The right underlay not only provides more living pleasure, it also extends the lifespan of the floor!



Fire retardant

We supply specialized, fire-resistant underlays and carpets. After all, good fire-retardant material can save lives.



Noise reduction

To prevent noise nuisance, installing sound-reducing underlays is very important. A sound-reducing underlay dampens contact noise.



Suitable for floor heating

For optimal use of the underfloor heating, we have special underlays in our range with a low resistance value (R-value).



We will improve your floor!

We know that choosing the right underlay is not an easy task. The range is large and there are many factors to take into account. It is therefore important to ask yourself in advance which properties you find important in a floor. This provides a lot of extra (living) enjoyment afterwards!



Leveling and stabilising

Leveling and preparing a floor must be done very accurately. After all, the final finish that you use must be tight.

The Floorfixx system range guarantees a stable subfloor. With these subfloors you can easily create a new, insulating and flat underlay in a dry way. In addition, the underlays of the Floorfixx range can also be directly loaded. This saves you a lot of time compared to wet levelling.



Heat insulating

A good heat-insulating underlay ensures that the heat is retained in a room for longer. In addition to saving on your energy bill, this also provides extra comfort under your feet.

Sustainable

In order to contribute to a circular economy, we are constantly innovating with new (more) sustainable products. Our sustainable products can be recognized by the Green Choice logo, so that you can easily make a sustainable choice. Both the sustainable subfloors and underlays are made from recycled material.



finity

best base

renu
sustainable recycled underlay

EGALSOFT
CARE FOR CARPETS



Best Base, Renu, Egalsoft and Finity are all products that consist of recycled material.

The products are made from the following materials:

- Recycled polyurethane foam
- Textile fibres
- Old PET bottles

Our sustainable products are easily recognizable by the Green Choice Logo. As a result, you always make the right choice and together with you we make the world a little better.





Product innovations that contribute to a circular economy

We stand with an open mind to the world and are very aware of the effects that our activities have on our environment and therefore take responsibility for minimizing these effects. For example, in 2019 we equipped our business premises with 500 solar panels. As a production organization we are therefore energy neutral and we consume just as much energy as we generate.

Unfortunately, the raw materials in our world are not infinite, which makes recycling indispensable. In order to be able to actively participate in a circular economy, we have done research. Because the more we can make from old raw materials, the less new we need.



Scan this code and discover our Green Choice products





We supply underlays to important players in the hospitality industry and work together with renowned hotel chains. Our products have already been successfully installed in numerous projects at home and abroad.

We have the right underlay for every room in the hotel, whether it concerns “heavy traffic areas”, conference rooms or guest rooms. We also offer the right solution for special requirements, such as renovation projects or requirements regarding fire retardancy.



**Scan this code
and discover our
Hospitality webpage**



There are special carpet underlays with the IMO certificate for use on ships. These certified products can be recognized by the CE mark in the form of a steering wheel logo. According to IMO (the International Maritime Organization), Estillon's products have excellent fire-resistant properties and the quality of the production process is guaranteed.



Systemfloors

LVT | LVT CLICK | LVT RIGID | CARPET
CARPET TILES | VINYL | LINOLEUM
PARQUET | LAMINATE | CORK

Why Choose Estillon for floor levelling?

- You can create a high quality, flat, stable, and permanently dry base floor with underlays
- Meet noise requirements
- Underlays lengthen the lifespan of your floor covering
- Underlays offer extra luxury and comfort


Do you recognise that your customers have little time for installing a new floor? Estillon has the solution! Save time using the Floorfixx underlay range instead of wet levelling.



Floorfixx

The benefits of Floorfixx underlays

- Fast levelling system
- Immediately ready to finish your floor
- Simple to install as a floating system
- Reduces noise

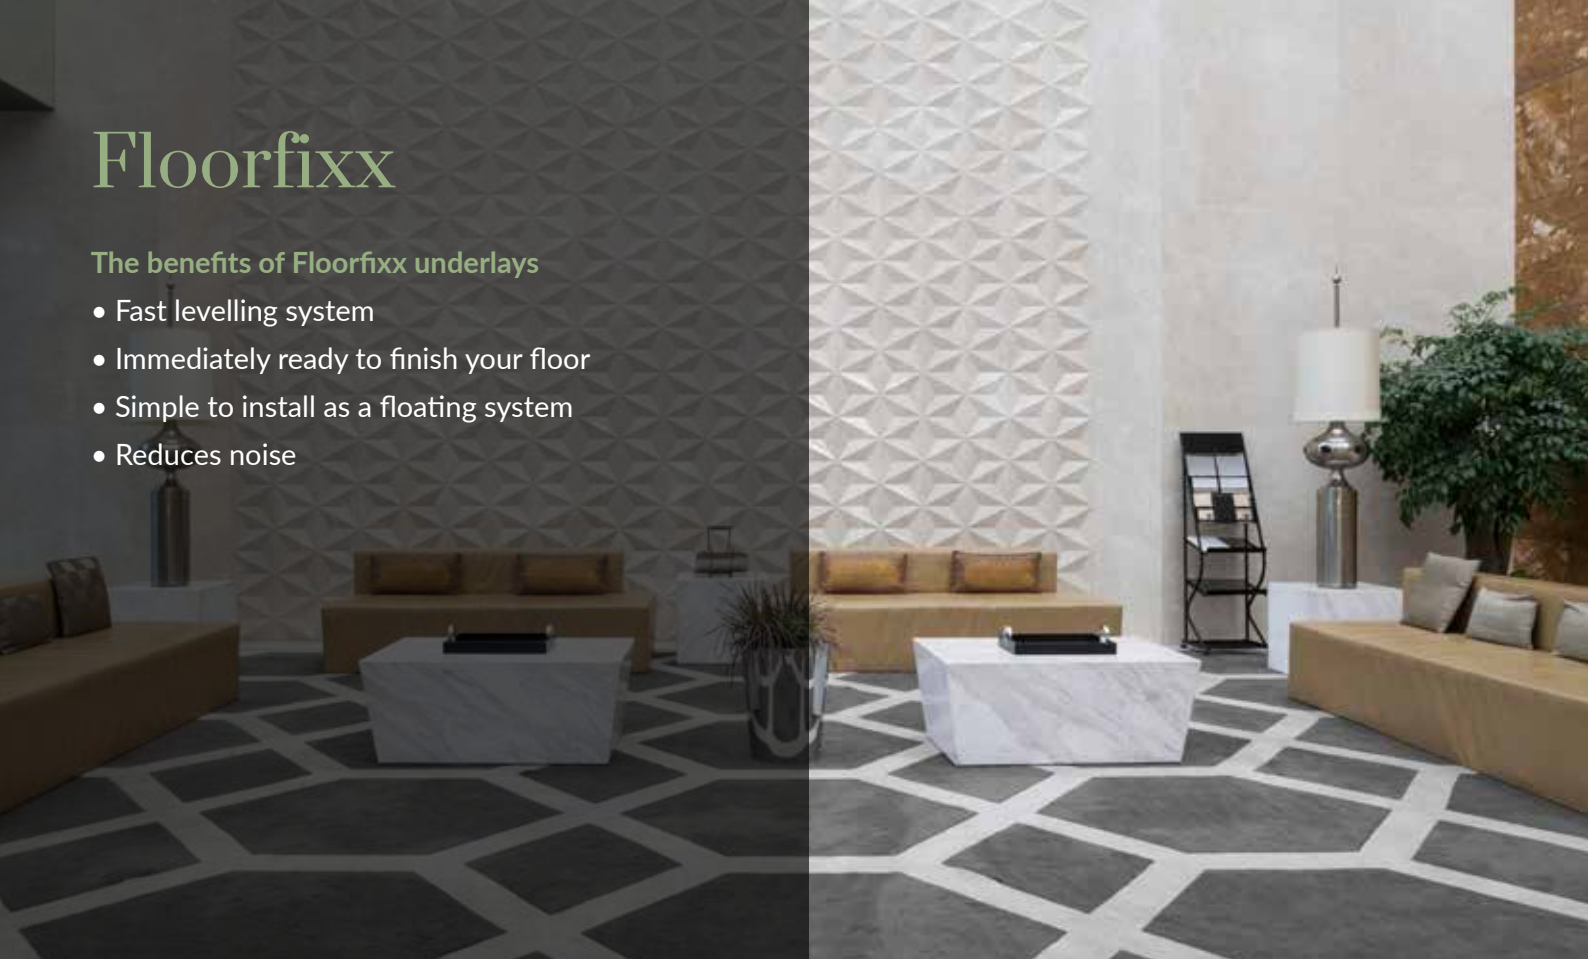


Floorfixx dry levelling system

Floorfixx is the underlay range for LVT Rigid, LVT Click, LVT Dryback, linoleum, cushion vinyl, carpet, carpet tiles and parquet flooring. These underlays allow you to easily create a new, insulating and flat subfloor with a dry installation. Furthermore, these underlays can bear load immediately, there is no need to wait until it is dry. This is a major advantage compared to wet levelling. Time saving, simple and clean. No long drying or waiting times.

These underlays are suitable for residential and project applications. On top of that, the Floorfixx underlays insulate against impact noise. Always install these underlays combined with a vapour or moisture barrier!

Floorfixx optimum

- Rapid installation due to self-adhesive layer
- No use of traditional glue
- Renovation of poor subfloors under LVT Dryback strips and tiles with thickness of at least 2.5 mm
- No waiting/drying times and can bear load immediately
- Levels out unevenness and provides maximum stability
- Guarantees a flat, solid base for your installation

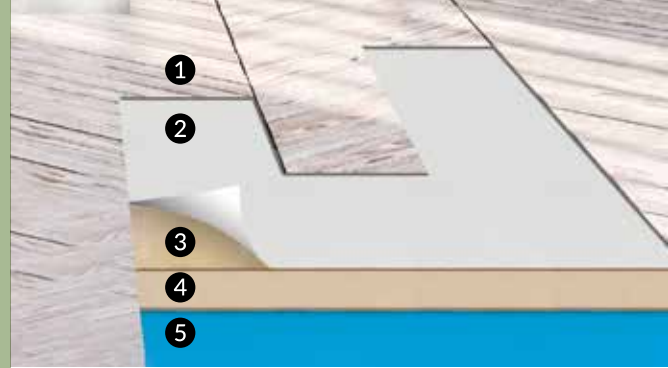


- 1 LVT Dryback
- 2 Silicone paper
- 3 MDF 3 mm / Upperside with glue
- 4 MDF 3 mm / Bottomside with XPS 2 mm
- 5 Moisture barrier

Floorfixx optimum is a system floor with a unique self-adhesive layer, which means that traditional glue is no longer necessary. In practice, the use of Floorfixx optimum means an enormous saving of time and money. There is no need to take into account waiting/drying times because the floor can be loaded immediately.

No need to take waiting and drying times into account because the floor can be used immediately. In practice, using Floorfixx optimum represents significant savings of time and money. Installation is easy with the handy lap joint connection. Create the installation plan easily on the silicone paper. You can start and stop installation at any time, since the silicone paper remains in place during installation. Floorfixx optimum is suitable for both residential and commercial applications.

Floorfixx optimum 8 mm 62107

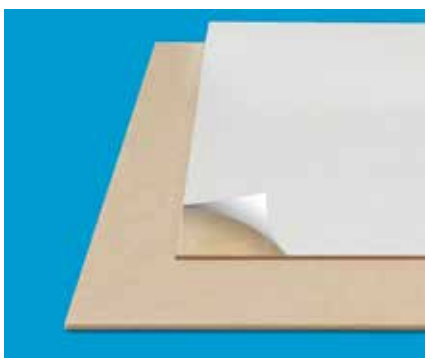

Defintion: Floorfixx optimum is a system floor with a unique self-adhesive layer: traditional glue is no longer required. With Floorfixx optimum, you quickly create a new, insulating, level and immediately usable underlay. Installation is easy with the handy lap joint connection.


Floor type: LVT Dryback

- Rapid installation due to self-adhesive layer
- No use of traditional glue
- No waiting/drying times and can bear load immediately



Basic content	Thickness / mm	Measurement	Underfloor heating
plates	8	82,5 x 56,5 cm (2,80 m ²)	possible
Density	Impact sound insulation	Heat resistance	Fire retardancy
720	21Δlw	0,123	Bfl-S1

Floorfixx fini 8 mm 62074

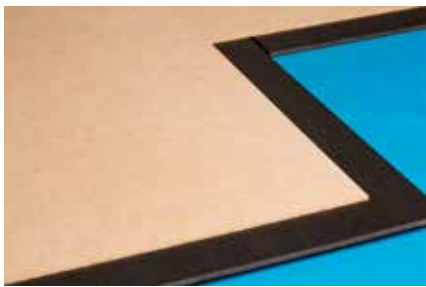

Defintion: Floorfixx fini is a system floor that helps correct minor underlay irregularities. The self-adhesive lap joint will help you to quickly and easily create a new, insulating and even underlay that can bear load immediately.

Floor type: LVT Click, LVT Rigid, carpet, carpet tiles, vinyl

- No waiting / drying times and directly taxable
- Self-adhesive lip-weld joint
- Insulates impact noise and complies with the 10dB standard set by the VvE



Basic content	Thickness / mm	Measurement	Underfloor heating
plates	8	85 x 59 cm (5,015 m ²)	no
Density	Impact sound insulation	Heat resistance	Fire retardancy
360	21Δlw	0,213	Efl-S1

Floorfixx smart 8 mm 62104



Defintion: Floorfixx smart is a system floor that, with the help of the handy lap joint, easily creates a new, insulating and even underlay that can bear load immediately.


Floor type: LVT Click, LVT Rigid, carpet, carpet tiles

- Levels out unevenness and provides maximum stability
- Guarantees a smooth, flat base for your installation
- Self-adhesive lip-weld joint



Basic content	Thickness / mm	Measurement	Underfloor heating
plates	8	82,5 x 56,5 cm (2,80 m ²)	possible
Density	Impact sound insulation	Heat resistance	Fire retardancy
720	20Δlw	0,123	Bfl-S1

Floorfixx regular 9 mm 62200

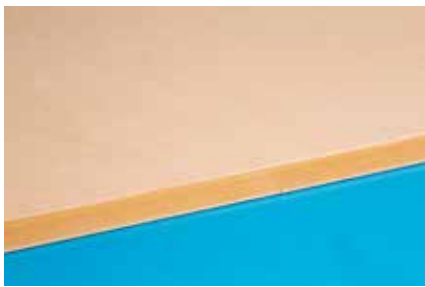

Defintion: Floorfixx regular is a system floor that, with the help of the sandwich system and interactive adhesive, quickly and easily creates a new, insulating and even underlay that can bear load immediately.

Floor type: LVT Click, LVT Rigid, LVT Dryback

- Guarantees a 100% smooth base for easy installation
- Easy to install
- Renovation of poor basic floors for linoleum, cushion vinyl, LVT strips, carpet and carpet tiles with a minimum thickness of 2 mm



Basic content	Thickness / mm	Measurement	Underfloor heating
plates	9	120 cm x 60 cm (2,88 m ²)	possible
Density	Impact sound insulation	Heat resistance	Fire retardancy
720	20Δlw	0,133	Bfl-S1

Floorfixx comfort 10 mm 62210



Defintion: Floorfixx comfort is a system floor which, with the aid of the sandwich system and the interactive adhesive, quickly and easily creates a new, insulating, level and directly loadable subfloor.


Floor type: LVT Click, LVT Rigid, LVT Dryback, vinyl, laminate parquet, linoleum, carpet and carpet tiles with a minimum thickness of 2 mm

- Suitable for underfloor heating and floor cooling due to its low thermal resistance
- Has been developed for use in projects where higher demands are made on quality due to heavy traffic
- Evens out unevenness and ensures maximum stability



Basic content	Thickness / mm	Measurement	Underfloor heating
plates	10	120 cm x 60 cm (2,88 m ²)	yes
Density	Impact sound insulation	Heat resistance	Fire retardancy
720	20Δlw	0,081	Bfl-S1

Floorfixx stripes 62094

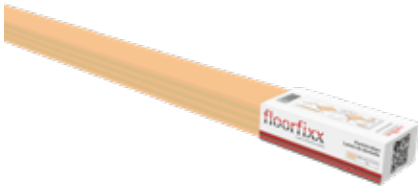

Defintion: Floorfixx stripes can be used in combination with the Floorfixx smart and Floorfixx optimum system floors. Intended for use under the edge on the first row so that you do not have to cut these Floorfixx boards. You can also use the stripes as a filling strip where necessary.

Basic content: Bundle of 7 pieces

Measurement: 820 x 65 x 5,2 mm

Floorfixx balance felt 0,7 mm 68217



Defintion: Needle felt underlay. Easy to cut and suitable for household and project applications. Floorfixx Balance Felt can be used in combination with Floorfixx Balance dry leveling fill and the Floorfixx system floors. Floorfixx Balance Felt is intended to easily create a flat base floor.

Basic content: Roll

Thickness/mm: 0,7 mm

Measurement: 50 x 1 m = 50 m²

Floorfixx balance 020 62215



Definition: Floorfixx Balance 020 is a dry levelling fill (according to DIN 18560-2) made of mineral-coated wood chips. Due to the special grain size distribution, Floorfixx Balance 020 is particularly suitable for levelling hollow spaces or height differences that need to be accommodated.

Floor type: LVT Click, LVT Rigid, LVT Dryback linoleum, parquet, carpet, carpet tiles, vinyl

- Insensitive to moisture
- Mould resistant and durable
- Ecologically recyclable

Grain-Size	Weight kg/m ³	Content Ltr.	Installation height
2-4 mm	370	50	0-20
Fire class	Grain compressive strength N/mm ²	Heat resistance	Underfloor heating
Bfl-S1	8,2	0,075	yes

Floorfixx balance 200 62216




Definition: Floorfixx Balance 200 is a dry levelling fill (according to DIN 18560-2) made of mineral-coated wood chips. Due to the special grain size distribution, Floorfixx Balance 200 is particularly suitable for levelling hollow spaces or height differences that need to be accommodated.

Floor type: LVT Click, LVT Rigid, LVT Dryback, linoleum, parquet, carpet, carpet tiles, vinyl

- Insensitive to moisture
- Mould resistant and durable
- Ecologically recyclable

Grain-Size	Weight kg/m ³	Content Ltr.	Installation height
4-8 mm	360	50	10-200
Fire class	Grain compressive strength N/mm ²	Heat resistance	Underfloor heating
Bfl-S1	12,6	0,08	yes

SPANfloor 12 mm 62106

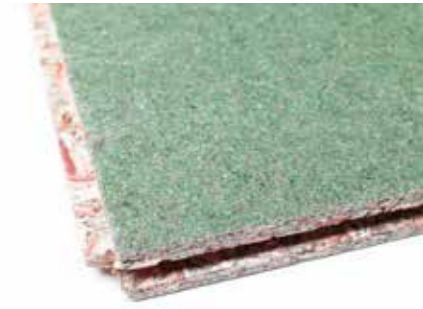

Defintion: SPANfloor is a system floor for the renovation of poor base floors. SPANfloor insulates and stabilises and is easy to install thanks to its tongue and groove edges. SPANfloor is suitable for both household and project use. With dimensions of 120 cm x 60 cm, it's easily manageable.

Floor type: strip parquet, carpet, carpet tiles, laminate

- Renovation of poor base floors
- Provides maximum levelling of unevenness
- Immediate load-bearing after installation

Basic content	Thickness / mm	Measurement	Underfloor heating
plates	12	120 cm x 60 cm (2,16 m ²)	no
Density	Impact sound insulation	Heat resistance	Fire retardancy
600	16Δlw	0,21	-

KOMBIfloor 17 mm 62105



Defintion: KOMBIfloor is a system floor for the renovation of poor base floors. KOMBIfloor insulates and stabilises and is easy to install thanks to its tongue and groove edges.

Floor type: vinyl, cork, tiles, carpet, laminate, parquet

- Renovation of poor base floors
- Provides maximum levelling of unevenness
- Immediate load-bearing after installation

Basic content	Thickness / mm	Measurement	Underfloor heating
plates	17	120 cm x 60 cm (2,16 m ²)	no
Density	Impact sound insulation	Heat resistance	Fire retardancy
600	19Δlw	0,25	-

floorfixx
made in Holland by estillon



Underlays for Carpet

CARPET | CARPET TILES





When you have chosen a new carpet, you naturally want to enjoy it for as long as possible. The comfort and durability is largely determined by the way it is installed. The right underlay guarantees a stable installation and enhances the experience of luxury and comfort. The sound-absorbing and heat-insulating properties simultaneously provide more living pleasure.

When you install carpet on an underlay, you choose the method that is durable and offers the most comfort. The carpet can be tensioned using the Smoothedge tensioning method. Or it can be glued to a suitable underlay. You do this by means of the single or double gluing method.

Here you will find our collection of underlays for carpet. In any case, always consult a specialist. Or contact our customer service. This way you always make the right choice.



Egalsoft®

Install more meters in less time!

Carpet has a luxurious look and feels comfort. The right carpet underlay further enhances this luxurious appearance and experience.

Why Egalsoft® carpet underlay?

- First of all, the carpet underlay is an impregnated nonwoven with an antislip equipment. In principle, you do not need any other glue*
- Ideal if you want to take the floor with you when you move out your house
- Installation is durable and simple, Egalsoft® is easy to cut
- No damage to the base floor due to the removable system
- Good sound absorption (27dB) and heat insulating
- Very good leveling and a high impression recovery ability
- Protects and extends the life of the carpet

* For heavy applications, we recommend installing Egalsoft® in anti-slip adhesive.

Egalsoft 6,5 mm 68240



Defintion: Egalsoft® is a unique anti-slip underlay that provides a durable and easy installation. The carpet underlay is an impregnated nonwoven with an anti-slip equipment.

Floor type: carpet

- Very good equalizing power
- Removable system without damaging the base floor
- High compressive strength



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6,5	22 m x 1,37 m = ± 30,14 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
131	27Δlw	0,22	Efl-S1

Egalsoft FR 6 mm 68244



Defintion: Egalsoft® is a unique anti-slip underlay that provides a durable and easy installation. The carpet underlay is an impregnated nonwoven with an anti-slip equipment.

Floor type: carpet

- Fire retardant Bfl-S1
- Very good equalizing power
- High compressive strength




Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	22 m x 1,37 m = ± 30,14 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
150	27Δlw	0,22	Bfl-S1

Best Base

The Best Base collection is a range of carpet underlays that are produced in an environmentally friendly way. They match perfectly with a carpet top floor.

The Best Base range covers various underlays, each with their own specifications and variations. What they have in common is that they are made from a 100% recycled mix of high quality clean recycled polyurethane foam. Which guarantees a stable and durable installation.

Best Base carpet underlays are suitable for both domestic and project use, such as the entrance, restaurants, corridors, rooms and stairs.

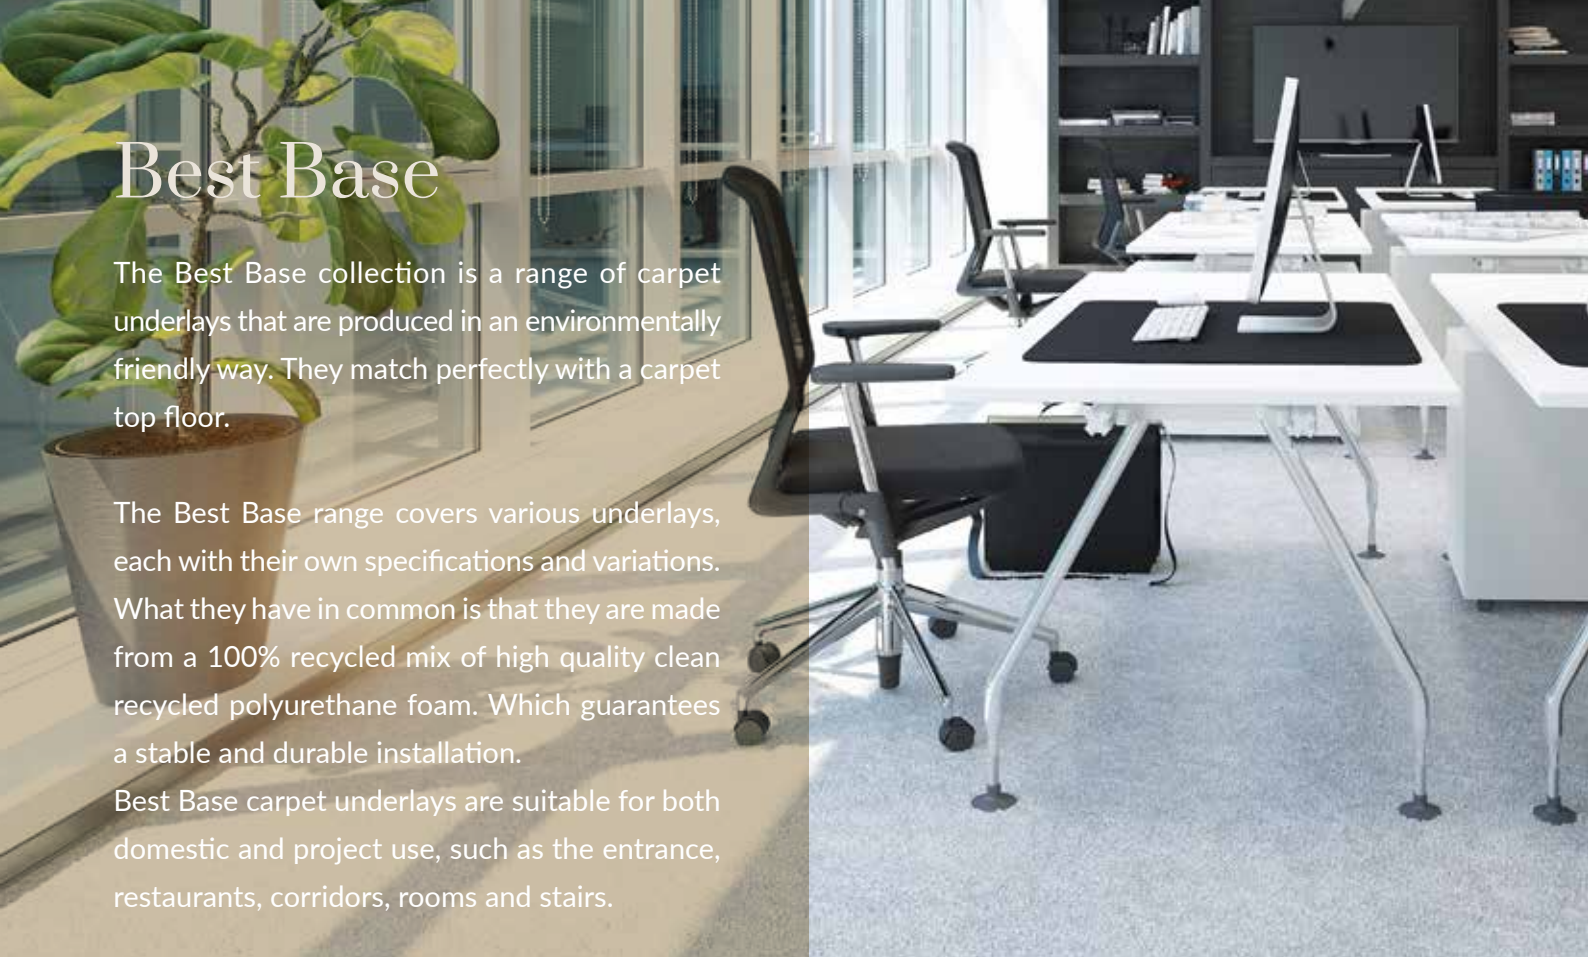

Advantages of Best Base underlays:

- Environmentally friendly production
- Manufactured from a 100% recycled blend of high quality clean polyurethane foam
- Ensures stable, long-lasting installation
- Easy to process
- Very high impression recovery capacity
- Enhances the carpet's experience of luxury and comfort
- Time and cost saving through the single stick method

Starbase 6 mm 71821



Definition: Starbase is an underlay produced from high quality recycled rebond polyurethane foam. Starbase is suitable for domestic and contract applications as entrances, restaurants, corridors, rooms and stairways.

Floor type: carpet

- Excellent compression recovery capability
- Environmental friendly produced and 100% recycled material
- Suitable for heavy project use



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
160	34Δlw	0,2	Bfl-S1

Starbase 8 mm 71822



Defintion: Starbase is an underlay produced from high quality recycled rebond polyurethane foam. Starbase is suitable for domestic and contract applications as entrances, restaurants, corridors, rooms and stairways.

Floor type: carpet

- Excellent compression recovery capability
- Light and easy to install
- Environmental friendly produced and 100% recycled material



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
160	37Δlw	0,27	Bfl-S1

Elegance Black FR 6 mm 71676



Defintion: Elegance Black FR is an underlay made of high quality recycled rebond polyurethane foam. The material guarantees a stable, durable installati-on and reinforces the experience of luxury and comfort of carpet.

Floor type: carpet

- Excellent compression recovery capability
- Suitable for heavy project use
- Fire retardant Bfl-S1



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
200	32Δlw	0,21	Bfl-S1

Elegance Red 7 mm 71702



Defintion: Elegance Red is an underlay made of high quality recycled rebond polyurethane foam. The light weight rebond polyurethane foam guarantees a stable, durable installation and reinforces the experience of luxury and comfort of carpet.

Floor type: carpet

- Excellent compression recovery capability
- Suitable for heavy project use



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
180	36Δlw	0,2	-

Egalbase 7 mm 716711



Defintion: Egalbase 7 mm is produced from high quality recycled rebond polyurethane foam with an adhesive tackified side on the underside. This lightweight polyurethane foam guarantees a stable and durable installation and increase the experience of luxury and comfort of the carpet.

Floor type: carpet

- Time and cost saving by means of the single stick method
- Excellent compression recovery capability
- Environmental friendly produced and 100% recycled material



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7	10 m x 1,5 m = ± 15 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
160	26Δlw	0,21	Bfl-S1

Oceanbase Contract FR 6 mm 71665



Defintion: Oceanbase Contract FR is an IMO flame retardant underlay ideal for marine vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- Environmental friendly produced and 100% recycled material
- IMO-certification
- Lightweight and easy to install



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
140	28Δlw	0,18	IMO

renu® 100% recyclable

renu®, the most responsible and recyclable carpet underlay we have ever made. Unique in the use of responsible and recycled materials. Reduces landfill waste and is 100% recyclable.

By choosing renu®, you can help reduce the 167,000 tons of waste foam that goes to landfill every year!

Eco performance renu® carpet underlay:

- Energy efficient
- The carpet underlay provides excellent heat insulation. This will contribute to a warm, comfortable home and save energy
- Comfort guaranteed
- Thanks to excellent sound absorption and the feeling of luxury and comfort under your feet, renu® will turn your home into a peaceful and comfortable base
- Made of high density foam, protects the carpet from premature wear. This means that the carpet will last longer

Tredaire renu® 6 mm 114107812



Defintion: renu® 6 mm, sustainably recycled carpet underlay produced from 98% recycled materials and is 100% recyclable. Suitable for carpet installation in domestic and project based use.


Floor type: carpet

- Environmentally aware: 100% recyclable, completely sustainable, CO2 neutral
No unnecessary damage to the forest and the environment
- Energy efficient: renu® 6 mm provides excellent thermal insulation
- Comfort guaranteed: Excellent sound absorption



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
160	35Δlw	0,185	Bfl-S1

Tredaire Flamecheck 4 mm 114107817

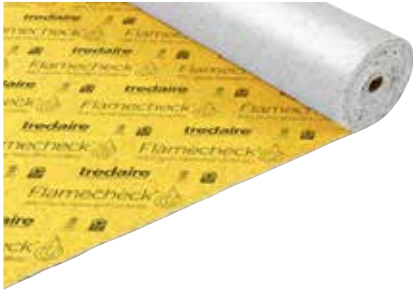

Defintion: Tredaire Flamecheck is an IMO flame retardant carpet underlay ideal for maritime vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- IMO flame retardant underlay
- Suitable for the double-stick and stretch-fit installation of carpets
- Recycled polyurethane rebond (PU)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	4	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
145	26Δlw	0,102	IMO

Tredaire Flamecheck 6 mm 114107806



Defintion: Tredaire Flamecheck is an IMO flame retardant carpet underlay ideal for maritime vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- IMO flame retardant underlay
- Suitable for the double-stick and stretch-fit installation of carpets
- Recycled polyurethane rebond (PU)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
145	30Δlw	0,158	IMO

Tredaire Flamecheck 8 mm 114107808



Defintion: Tredaire Flamecheck is an IMO flame retardant carpet underlay ideal for maritime vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- IMO flame retardant underlay
- Suitable for the double-stick and stretch-fit installation of carpets
- Recycled poyurethane rebond (PU)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
145	32Δlw	0,172	IMO

Tredaire FR 6 6 mm 114107813



Defintion: A hard-wearing, high density, flame retardant carpet underlay ideal for extending the life of the carpet in any location where flame retardancy is required.

Floor type: carpet

- HC/U, heavy contact use
- Suitable for the double-stick and stretch-fit installation of carpets
- Recycled poyurethane rebond (PU)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
200	35Δlw	0,168	Bfl-s1

Tredaire FR7 7 mm 114107807



Defintion: A hard-wearing, high density, flame retardant carpet underlay ideal for extending the life of the carpet in any location where flame retardancy is required.

Floor type: carpet

- Suitable for the double-stick and stretch-fit installation of carpets
- Flame retardant HC/U, Heavy Contract Use
- Recycled poyurethane rebond (PU)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
145	34Δlw	0,199	Bfl-S1

Cloud 9 FR 6 mm 71690



Defintion: Cloud 9 is an IMO flame retardant carpet underlay ideal for maritime-vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- IMO flame retardant underlay
- Suitable for double-stick and stretch-fit installation of carpet
- Provides comfort

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
169	32Δlw	0,14	IMO

Cloud 9 FR 8 mm 71691




Defintion: Cloud 9 is an IMO flame retardant carpet underlay ideal for maritime vessels, offshore installations, hotels and any location where flame retardancy is a must.

Floor type: carpet

- IMO flame retardant underlay
- Suitable for double-stick and stretch-fit installation of carpet
- Provides comfort

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	11 m x 1,37 m = ± 15,07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
167	38Δlw	0,17	IMO

Tredaire Brio 8 mm 114107811

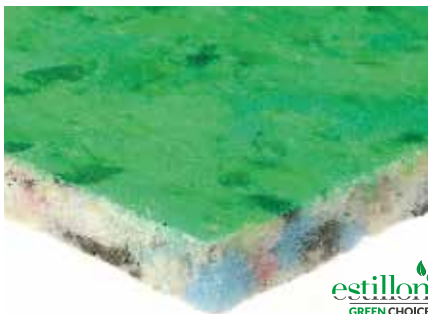

Defintion: Polyurethane rebond suitable for stretch-fit carpet installation

Floor type: carpet

- Light weight and easy to process
- Environmentally friendly produced and 100% recycled
- High capacity to restore to its original state

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	1.37m x 11.00m = ± 15.07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
100	32Δlw	0,218	-

Tredaire Premier Titanium 8 mm 114107818




Defintion: Polyurethane rebond suitable for stretch-fit carpet and double stick installation (up to 30m³)

Floor type: carpet

- High capacity to restore to its original state
- Environmentally friendly produced and 100% recycled
- Light weight and easy to process

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	1.37m x 11.00m = ± 15.07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
180	39Δlw	0,222	-

Tredaire Dreamwalk 8 mm 114107820

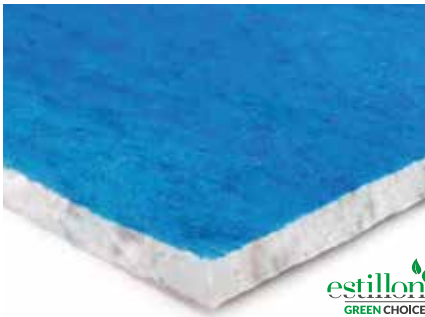

Defintion: Polyurethane rebond suitable for stretch-fit carpet installation

Floor type: carpet

- High capacity to restore to its original state
- Environmentally friendly produced and 100% recycled
- Light weight and easy to process

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	1.37m x 11.00m = ± 15.07 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
110	44Δlw	0,313	-

Tredaire Defender 6,1 mm 114107804



Defintion: A highly versatile single faced underlay for areas of both medium and heavy traffic.

Floor type: carpet

- Suitable for the stretch-fit installation of carpets
- Flat sponge rubber
- HC/U, Heavy Contract Use

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6,1	11,33 m x 1,33 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
495	30Δlw	0,08	Bfl-S1

Tredaire Dynamics 9,4 mm 114107805



Defintion: A hard wearing yet luxury carpet underlay suitable for stretch fit installations.

Floor type: carpet

- Suitable for the stretch-fit installation of carpets
- Flat sponge rubber
- L/U, Luxury Use

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	9,4	8,24 m x 1,33 m = ± 10,96 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
368	35Δlw	0,13	-

Tredaire System Ten 9,2 mm 114107809PP




Defintion: System Ten is a recycled high density crumb rubber rated for heavy contract. Once bonded directly to your carpet provides unrivalled stability

Floor type: carpet

- Suitable for single-stick applications in areas up to 33 sq. Metres
- Suitable for double stick and conventional fitting. Providing unrivalled stability
- Recycled high density crumb rubber

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	9,2	8 m x 1,37 m = ± 10,96 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
435	31Δlw	0,155	Cfl-S1

Tredaire Treadmore 7,95 mm 114107810

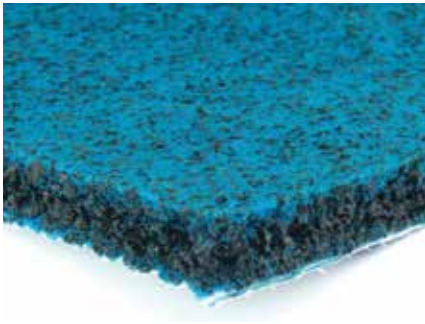

Defintion: Treadmore rubber crumb offers outstanding recovery and longevity. Ideal for high traffic areas of the home.

Floor type: carpet

- Ideal for staircase & landing
- Recycled High density crumb rubber
- Durable

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7,9	8,24 m x 1,33 m = ± 10,96 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
390	32Δlw	0,103	-

Tredaire Super MK3 114100105



Defintion: Crumb rubber suitable for stretch-fit installation of carpet

Floor type: carpet

- Extends the lifespan and preserves the original appearance of the carpet

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6,75	1,37 m x 11,00 m = ± 15,07m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
359	26Δlw	0,115	-

Tredaire Colours Red 11,4 mm 114107803



Defintion: Crumb rubber suitable for stretch-fit installation of carpet

Floor type: carpet

- Stable and easy to process
- Stable and easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	11,4	1.33 m x 8.24 m = ± 10,96 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
357	46Δlw	0,165	-

Tredaire Hallmark Supreme 9,5 mm 114107802



Defintion: Sponge rubber underlay suitable for luxury use with an extremely comfortable feel underfoot.

Floor type: carpet

- Superb heat insulation
- Sumptuous comfort
- Good sound reduction

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	9,5	1,37 m x 8 m = ± 10,96 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
410	42Δlw	0,151	-

Black Diamond 6 mm 681211



Defintion: Black Diamond is a carpet underlay produced from ribbed sponge rubber. The heavy sponge rubber creates a stable and durable base for every carpet. Black Diamond delivers a maximum contribution to the experience of luxury and comfort of the carpet. Black Diamond is suitable for domestic and H.D. contract applications.

Floor type: carpet

- Stable base for installation and easy process
- Smoothing small unevennesses in the subfloor
- Extends the lifetime and original appearance of the carpet

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	7,3 m x 1,37 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
500	25Δlw	0,06	Bfl-S1

Black Magic 6 mm 681181



Defintion: Black Magic is an underlay produced of 100% SBR rubber. The heavy rubber underlay creates a stable, comfortable and durable base for any installation. Black Magic contributes to the experience of luxury and comfort of the carpet. Black Magic is suitable for domestic, light and heavy project use.

Floor type: carpet

- Stable base for installation and easy process
- Smoothing small unevennesses in the subfloor
- Especially suitable for floor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	11 m x 1,37 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
584	25Δlw	0,08	Bfl-S1

Black Pearl 3 mm 68122



Defintion: Black Pearl is a rubber underlay and creates a stable, comfortable and durable base for any installation. Black Pearl contributes optimally to the experience of luxury and comfort of the carpet and is suitable for domestic and project use.

Floor type: carpet

- Extends the lifespan and preserves the original appearance of the carpet
- Smoothing small unevennesses in the subfloor
- Excellent improvement of the acoustic conditions

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3	11m x 1,37 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
730	19Δlw	0,03	Bfl-S1

Black Pearl 5 mm 681201




Defintion: Black Pearl is an underlay made of flat sponge rubber. The heavy rubber underlay creates a stable, comfortable and durable base for any installation. Black Pearl contributes optimally to the experience of luxury and comfort of the carpet. Black Pearl is suitable for domestic light and heavy project use.

Floor type: carpet

- Extends the life span and preserves the original look of the carpet
- Smoothing small unevennesses in the subfloor
- Excellent improvement of the acoustic conditions

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5	7,3 m x 1,37 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
542	29Δlw	0,056	Bfl-S1

Duralay Heatflow 6,1 mm 114100117

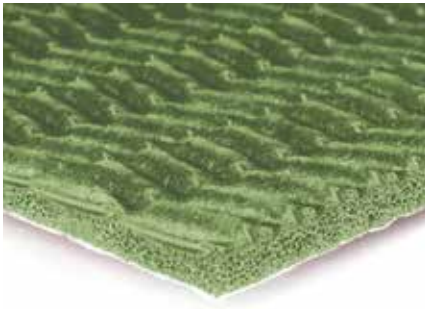

Defintion: Duralay Heatflow underlays, all have lower 'tog' ratings, which allow the warmth generated by underfloor heating to pass quickly into the room. They conduct more heat than other underlays, making them the ideal choice for installations with underfloor heating, bringing greater heating eiciency and the potential of reducing heating bills.

Floor type: carpet

- Sponge rubber underlay provides excellent underfoot comfort
- Carpet looks better and lasts longer
- Low tog rating makes it ideal for underfloor heating installations with carpet

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6,1	7,30 m x 1,37 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
495	31Δlw	0,075	-

Duralay Technics 5 mm 68616



Defintion: The complete solution to contract carpet installation Technics is a high specification twin scrim underlay using the unique Textron® backing to provide exceptional dimensional stability, making it ideal for contract applications.

Floor type: laminate, parquet and carpet

- Durable sponge rubber
- Proven reputation for contract installations
- Suitable for double-stick

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5	1,37 m x 11 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
542	29Δlw	0,056	Bfl-S1

Duralay Technics 6 mm 68620



Defintion: Technics is a high specification twin scrim underlay using the unique Textron® backing to provide exceptional dimensional stability, making it ideal for contract applications.

Floor type: carpet

- Durable sponge rubber
- Proven reputation for contract installations
- Suitable for double-stick

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	1,37 m x 11 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
526	34Δlw	0,066	Bfl-S1

Duralay Durafit 500 5 mm 114100103




Defintion: Duralay's Durafit System was the first double-stick system for carpet and underlay when it was launched in the 1980s. It's now the standard for stick-down systems and has been used successfully in thousands of contract installations, large and small, around the world.

Floor type: carpet

- World's leading double stick system
- Ideal for heavy & wheeled traffic areas
- High density crumb rubber

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5	1,37 m x 11 m ± 15,07	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
400	26ΔIw	0,088	Bfl-S1

Duralay Durafit 650 6,5 mm 114100104

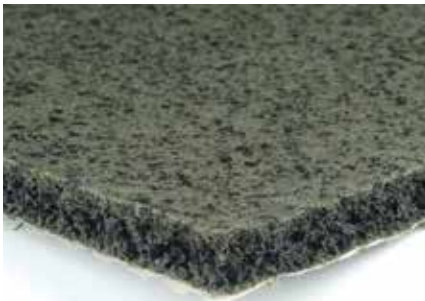

Defintion: Duralay's Durafit System was the first double-stick system for carpet and underlay when it was launched in the 1980s. It's now the standard for stick-down systems and has been used successfully in thousands of contract installations, large and small, around the world. It is the perfect, trusted, system for heavy-wear contract installations, giving increased carpet life, improved appearance retention and greater dimensional stability. Suitable for the double-stick and stretch-fit installation of carpets and natural floor coverings.

Floor type: carpet

- World's leading double stick system
- Ideal for heavy & wheeled traffic areas
- High density crumb rubber

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6,5	1,37 m x 11 m = ± 15,07 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
415	28ΔIw	0,11	Cfl-S1

best base



Tredaire King 8,3 mm 114107800



Defintion: Sponge rubber underlay with a low tog rating suitable for underfloor heating. A luxury use underlay with a comfortable feel underfoot. Good at minimising both impact sound and airborne sound between rooms.

Floor type: carpet

- Helps your carpet last longer
- Luxury comfort
- Ideal for underfloor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8,3	1,33x8,24=10,96 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
510	42Δlw	0,08	-

Tredaire New Supreme 8,75 mm 114107819



Defintion: A single faced 'waffle' underlay. Its thicker gauge is supported by a tight waffle pattern, thicker cell wall and tightly stitched Textron backing which combine to give a higher level of underfoot comfort and excellent levels of recovery.

Floor type: carpet

- Excellent thermal insulation
- Provides comfort
- Good noise reduction

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8,75	1.37m x 8.00m = ± 10,96m ²	-
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
391	39Δlw	0,1	-

Tredaire Willow Green 8,4 mm 114107821



Defintion: Sponge rubber suitable for stretch-fit installation of carpet

Floor type: carpet

- Ensures excellent comfort
- Extends the life of the carpet

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8,4	1.37m x 11.00m =± 15,07 m ²	-
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
323	32Δlw	0,11	-

Tredaire Xtra 8,25 mm 114107822



Defintion: Sponge rubber suitable for stretch-fit installation of carpet

Floor type: carpet

- Extends the life of the carpet
- Suitable for stretch-fit installations

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8,25	1.37m x 11.00m = ± 15,07m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
308	35Δlw	0,151	-

Royale 550 5,5 mm 68590



Defintion: A hard wearing yet comfortable carpet underlay suitable for stretch fit installations.

Floor type: carpet

- Suitable for the stretch-fit installation of carpets
- Flat sponge rubber
- HC/U, Heavy Contract Use

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5,5	7,52 m x 1,33 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
na	30Δlw	0,07	-

Royale 600 6 mm 114107600




Defintion: A hard wearing yet comfortable carpet underlay suitable for stretch fit installations.

Floor type: carpet

- Suitable for the stretch-fit installation of carpets
- Flat sponge rubber
- HC/U, Heavy Contract Use

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	7,52 m x 1,33 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
na	30Δlw	0,07	-

Royale 700 7 mm 114107700

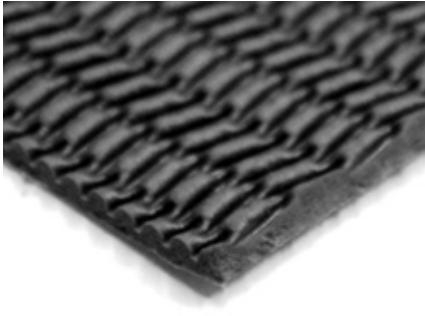

Defintion: A hard wearing yet comfortable carpet underlay suitable for stretch fit installations.

Floor type: carpet

- Suitable for the stretch-fit installation of carpets
- Flat sponge rubber
- HC/U, Heavy Contract Use

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7	7,52 m x 1,33 m = ± 10 m ²	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
na	31Δlw	0,08	-

Carpet Cushion 11 mm 68131



Defintion: Carpet Cushion is an underlay made of blown sponge rubber. Creates a stable, comfortable and durable base for any installation. Carpet Cushion contributes optimally to the experience of luxury and comfort of the carpet and is suitable for domestic use.

Floor type: carpet

- Stable and easy to work with
- Egalizes unevenness in the base floor
- Reduces walking noise

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	11	5,5 m x 1,37 m = ± 7,5 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
374	42	0,12	Efl

Finity 5 mm 68216



Defintion: Easy to cut. 100% PET needle felt underpadding for a durable installation. The padding consist of needle punched recycled yarn of PET bottles. Finity is applicable for domestic use.

Floor type: carpet

- Made from PET bottles
- After use ready to re-use
- For stretched installation of carpets

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5	35 m x 2 m = ± 70 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
100	25Δlw	0,22	Efl-S1

Finity 6 mm 68218



Defintion: Easy to cut. 100% PET needle felt underpadding for a durable installation. The padding consist of needle punched recycled yarn of PET bottles. Finity is applicable for domestic use.

Floor type: carpet

- Made from PET bottles
- After use ready to re-use
- For stretched installation of carpets

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	35 m x 2 m = ± 70 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
100	25Δlw	0,22	Efl-S1

Extra Natural 8 mm 68152



Defintion: Impregnated cut resistant needle felt underlay made of saturated recycled textile fibres, impregnated with latex, for a durable installation. Extra natural felt is suitable for domestic use.

Floor type: carpet

- Very good levelling capacity
- Good impression restoring ability
- Very cut-resistant for fast and tight processing

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	8	30 m x 2 m = ± 60 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
106	27Δlw	0,27	Efl-S1

Standard Felt 6 mm 68215



Defintion: Impregnated cut resistant needle felt underlay consisting of nickel-plated recycled textile fibres impregnated with latex. For a durable installation. Standard felt is suitable for domestic use.

Floor type: carpet

- Very good levelling capacity
- Extends the life of the carpet
- Good impression restoring ability

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	6	35 m x 2 m = ± 70 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
100	na	0,23	Efl-S1

Felt underlay 4 mm R906 A2



Defintion: Recycled needle felt underlay for sustainable carpet installation. Easy to cut and suitable for household and project applications.

Floor type: carpet


- Good levelling properties
- Extends the life of the carpet
- High capacity to restore to its original state

Basic content: Roll

Thickness: 4 mm

Measurement: 25 x2 m

Protective felt R903 A2

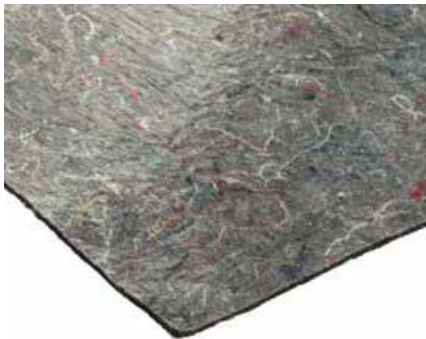

Defintion: Underlay made of jute and acrylic mix. Easy to cut for a durable installation.

Floor type: carpet

- Easy to cut
- Minimum order of 50 rolls per delivery
- Minimum order of 50 rolls per delivery

Basic content: Roll

Thickness: 3 mm

Measurement: 25 x 2 m

Felt underlay 5 mm R91455A - R91465A - R91475A - R91485A



Defintion: Recycled needle felt underlay for sustainable installation of carpet.

Floor type: carpet

- Extends the life on the carpet
- Easy to cut
- Minimum order of 50 rolls per delivery

Basic content: Roll

Thickness: 5 mm

Measurement:

R91455A - 30 x 0,55 m (16,5 m²)

R91465A - 30 x 0,65 m (19,5 m²)

R91475A - 30 x 0,75 m (22,5 m²)

R91485A - 30 x 0,85 m (25,5 m²)

Egalfloor Classic 7 mm 620612



Defintion: Egalfloor Classic is a high quality softboard of softwood suitable for parquet/laminate & carpet installation for domestic use.

Floor type: laminate, parquet, carpet

- Strong equalization capacity
- Immediate loadbearing after installation
- Quick and easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	7	850 x 590 mm = 10,03 m ²	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
250	19Δlw	0,1	Efl-S1

Underlays for hard flooring


LVT CLICK | LVT RIGID | VINYL | LINOLEUM
PARQUET | LAMINATE



Which underlay should I choose for my LVT Click, laminate or parquet floor? That is a question we often get and not entirely incomprehensible, because choosing the right underlay is not always easy.

Whether you buy, sell or install underlays, it is important to know that a high-quality underlay contributes to a longer life span of the floor. Underlays ensure a stable and durable installation. The floor is protected against premature wear. An underlay also enhances the experience of luxury and comfort. Our underlays provide good sound absorption and have insulating properties.


We offer various products that are suitable for underfloor heating. We also have an extensive range of underlays with fire-resistant properties. Of course equipped with the required certificates.

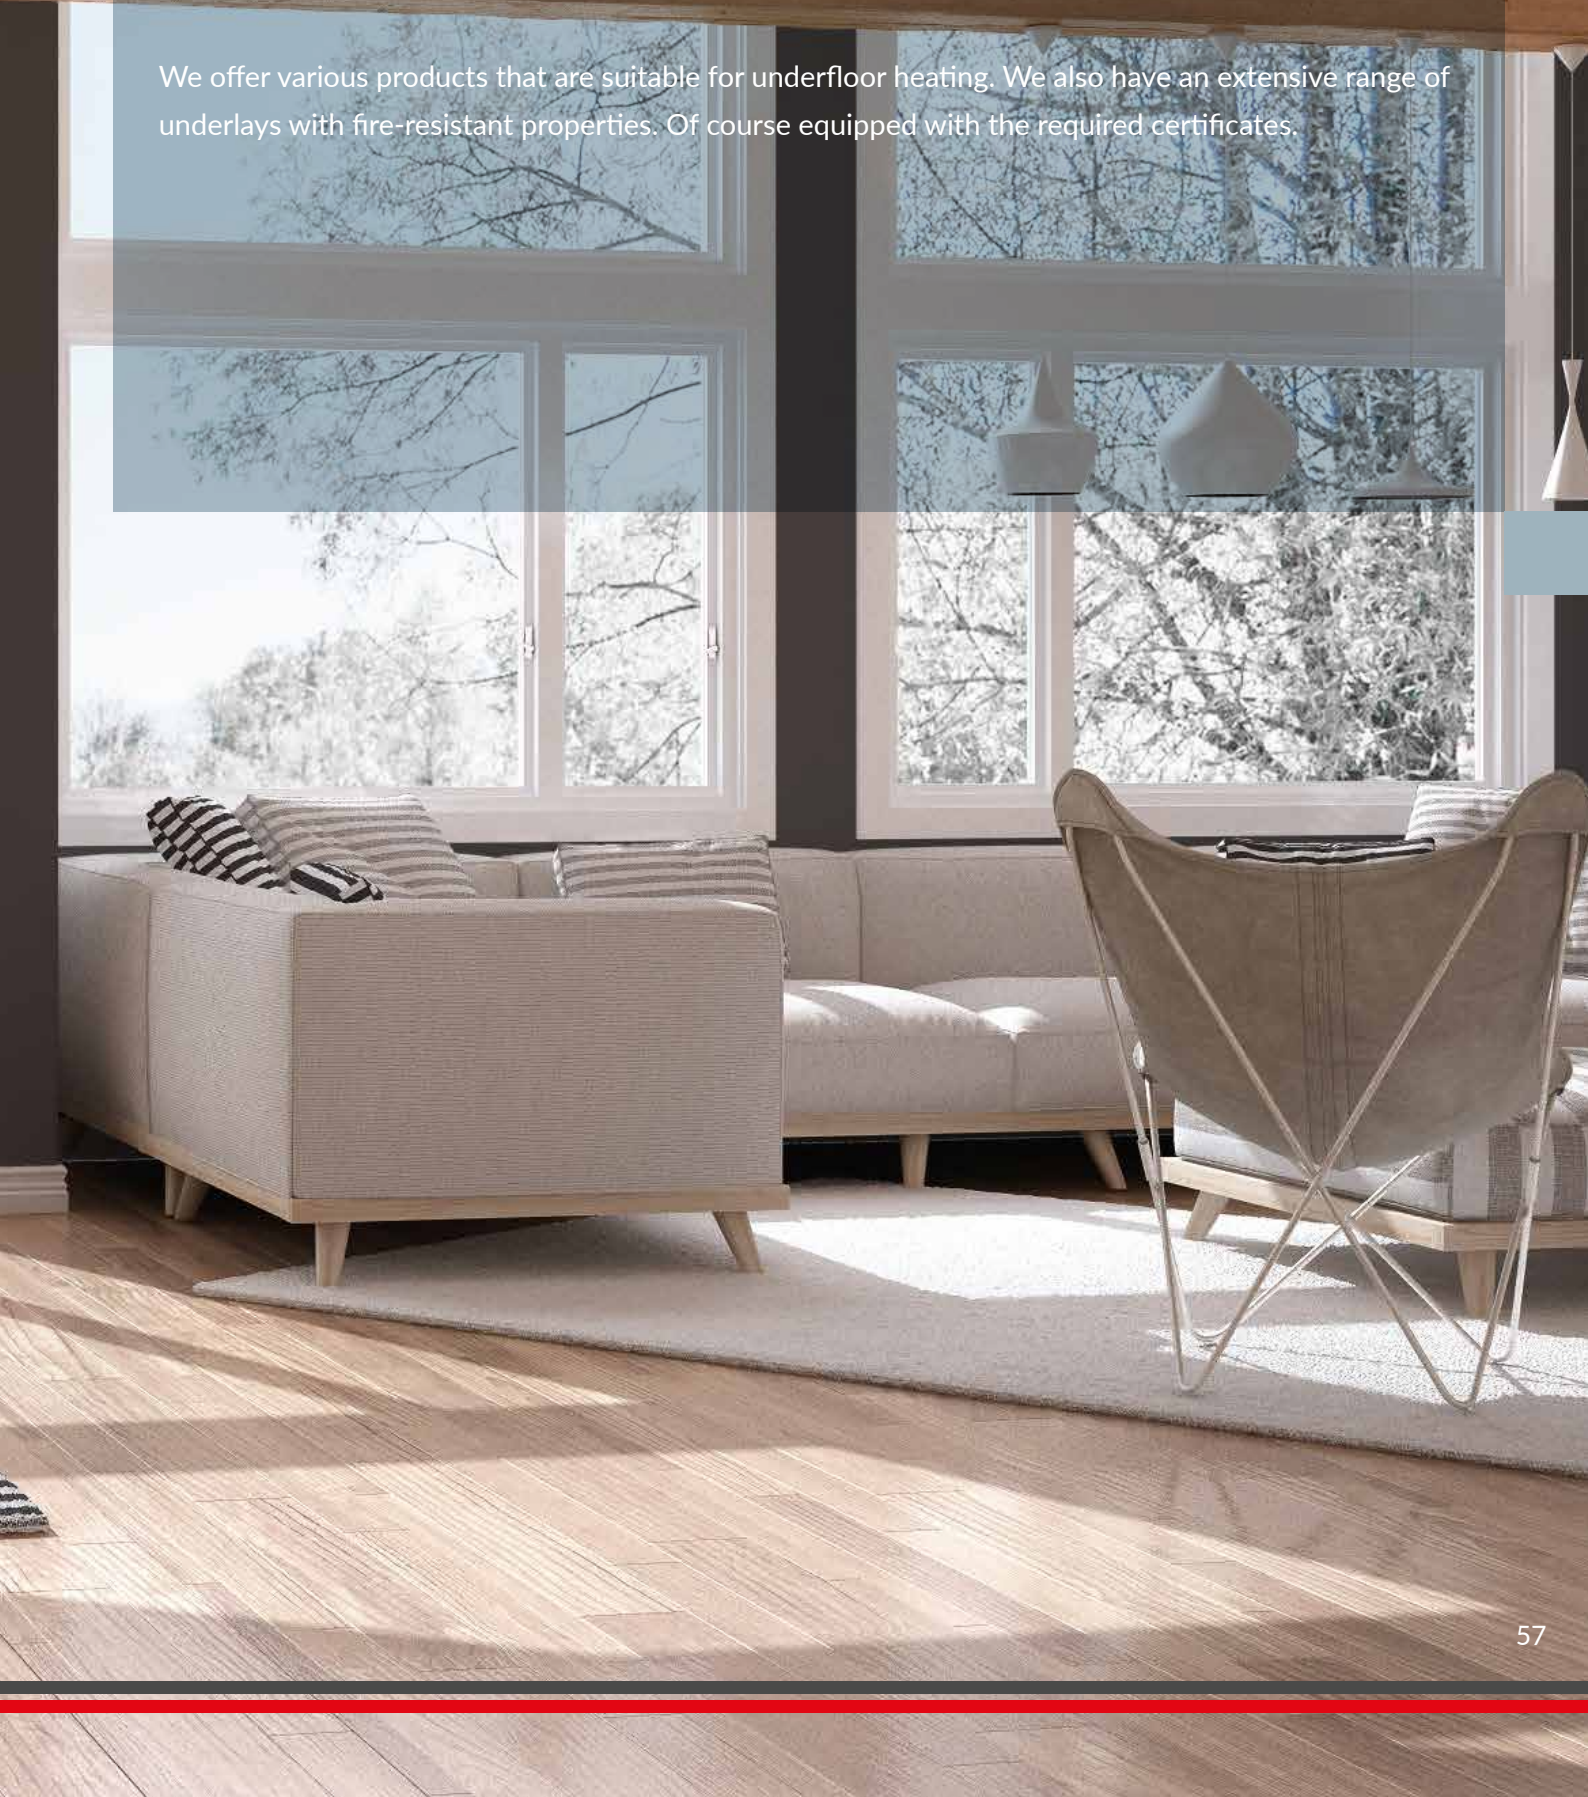

Duralay LVT Multi-fit underlay

We would like to introduce you to the Duralay LVT Multi-Fit 1.5 mm underlay. This versatile underlay has been specially developed for laminate, parquet, LVT Click and LVT Dryback. LVT Multi-Fit offers exceptional stability and excellent comfort for all living and working areas.

Suitable for domestic and commercial applications such as hotels, offices and shipbuilding. This underlay really meets all important requirements and is of course equipped with the corresponding certificates. This makes choosing the right underfloor a lot easier.

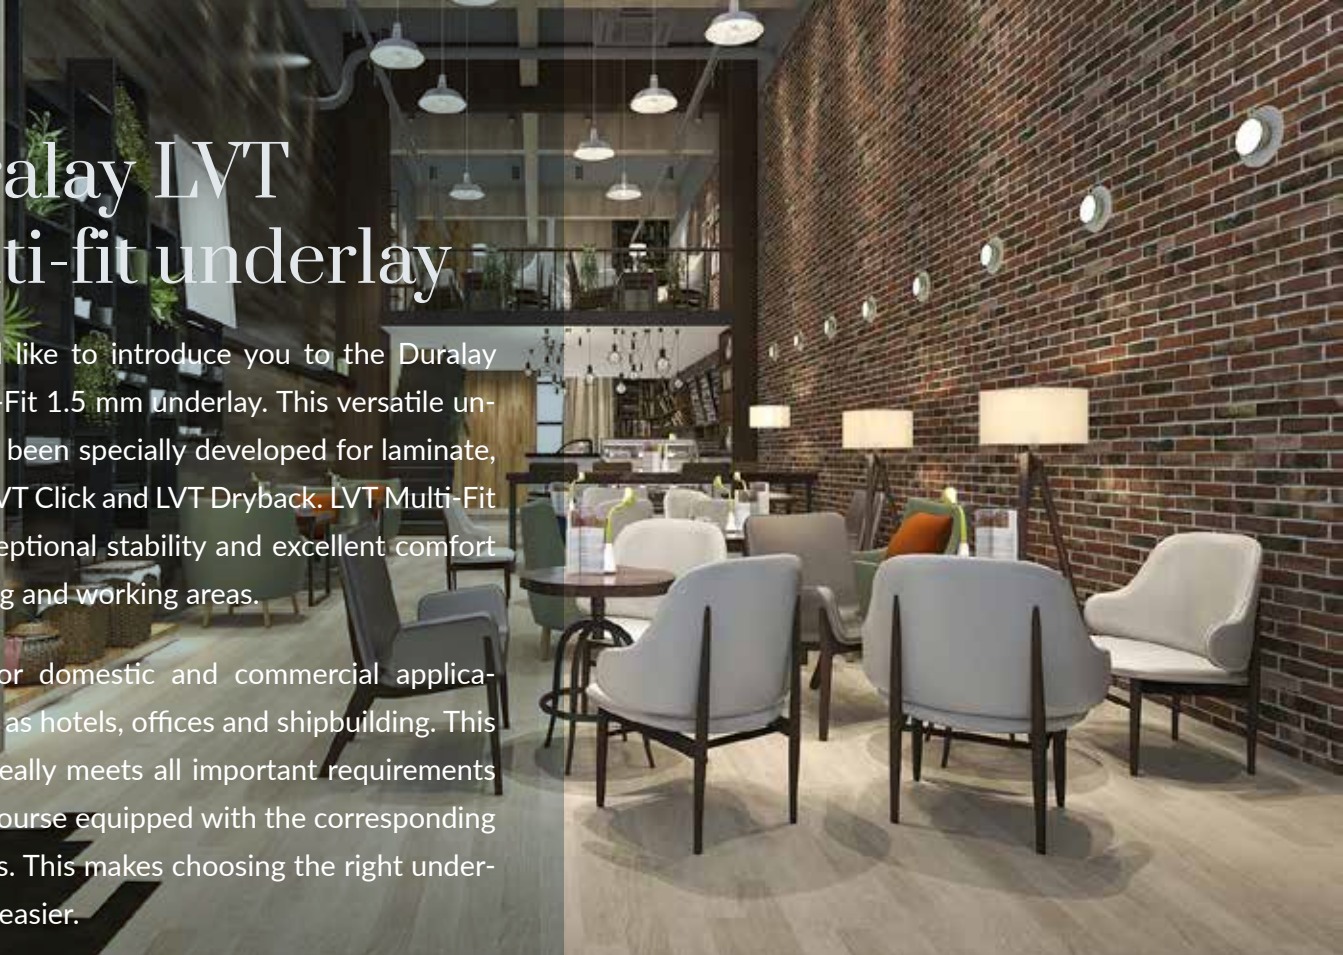

The advantages of LVT Multi-fit carpet underlay:

- Fire retardant
- Improves noise reduction 10dB ΔL_{in}
- Suitable in combination with underfloor heating
- Provides exceptional stability
- Masks minor surface imperfections
- Excellent pressure resistance
- Improves walking comfort
- IMO certified underlay, recommended for maritime vessels and offshore installations
- Suitable for domestic and project use

Duralay LVT Multi-Fit 1,5 mm 114100111



Defintion: Duralay LVT Multifit is an IMO flame retardant underlay ideal for maritime vessels, offshore installations, hotels and any location where flame retardancy is a must. The underlay can be fitted, loose lay, single stick or double stick depending upon your LVT installation requirements.

Floor type: LVT Click & LVT Dryback

- Improved noise reduction specifically designed for LVT flooring
- Provides an excellent subfloor, masking minor surface imperfections, and helping prevent the over straining of joints
- Increased underfoot comfort




Noise Reduction
Regular Product
Surveillance
www.tuv.com
ID: 0000078324



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1,5	7,30 m x 1,37 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
503	21ΔI _w	0,012	IMO

Duralay LVT Low-grab 1,5 mm 114100121

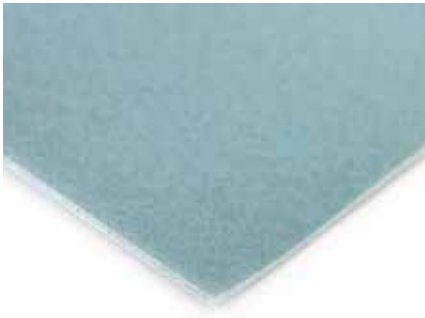

Defintion: Duralay LVT Low-Grab Underlay is a versatile underlay solution which can be used to install 'Click fit' luxury vinyl tiles.

Installation is quick, clean and simple.


The underlay is loose laid over the subfloor or existing flooring and the new flooring is positioned and pressed onto the underlay's low grab backing.

Floor type: LVT Click

- Unique low grab backing
- Considerably reduced installation times and costs
- Quick to fit, easy to work with

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1,5	10 m x 1 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
420	17Δlw	0,01	Bfl-S1

Duralay LVT Dry Back 1,8 mm 114100122

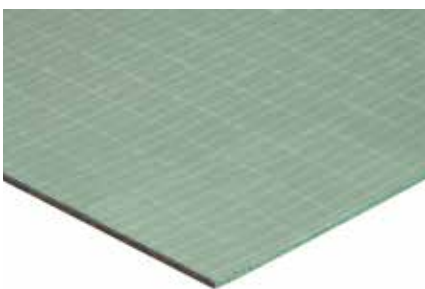

Defintion: Duralay LVT Dryback Underlay is a versatile underlay solution which can be used to install 'Dryback' luxury vinyl tiles. Reducing subfloor preparation time.

Installation is quick, clean and simple. The underlay is loose laid over the subfloor or existing flooring. The release film is peeled back to expose the adhesive, the new flooring is then positioned and pressed onto the underlay's high grab backing.

Floor type: LVT Dryback

- Unique low grab backing
- Considerably reduced installation times and costs
- Quick to fit, easy to work with

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1,8	6,5 m x 1 m = ± 6,5 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
445	15Δlw	0,01	Bfl-S1

Duralay Timbermate Excel 3,6 mm 68589



Defintion: Noise reducing wood & laminate underlay

Timbermate Excel reduces in-room noise by up to 30% and contains our Vapourstop barrier to help prevent moisture.

Floor type: laminate, parquet

- Includes vapour barrier
- Reduce noise up to 30%
- Quick & easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3,6	11 x 1,37 m = ± 15,07 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
707	23Δlw	0,055	Cfl-S1

Duralay Timbermate Excel DIY 3,6 mm 68585



Defintion: Noise reducing wood & laminate underlay

Timbermate Excel reduces in-room noise by up to 30% and contains our Vapourstop barrier to help prevent moisture.

Floor type: laminate, parquet

- Includes vapour barrier
- Reduce noise up to 30%
- Quick & easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3,6	14,6 x 0,685 = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
707	23Δlw	0,055	Cfl-S1

Duralay Silentfloor Gold2 4,2 mm 114100119




Defintion: Our most effective noise reducing underlay, decreasing inroom noise by up to 30%, and contains our Vapourstop barrier to help prevent moisture. Prevents the overstraining of wood and laminate boards. Provides an excellent sub-floor masking minor surface imperfections. Simple, quick and easy to install.

Floor type: laminate, parquet

- Includes vapour barrier
- Reduce noise up to 30%
- Quick & easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	4,2	1,37 m x 7,29 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	24Δlw	0,033	Cfl-S1

Duralay Silentfloor Plus2 3 mm 114100123

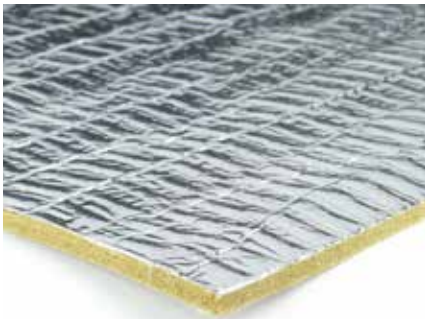

Defintion: Noise reducing underlay with an Integral vapourstop barrier. Suitable for the floating installation of laminate and solid timber floors.

Floor type: laminate, parquet

- High-density resilient rubber Reduces in-room noise
- Prevents the over-straining of wood and laminate board joints
- Provides an excellent sub-floor, masking surface imperfections when installing



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3	1,37 m x 7,29 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	20Δlw	0,038	Cfl-S1

Woodstep 3 mm 68592



Defintion: Woodstep underfloor is a flat sponge rubber, laminated with a reinforced aluminium moisture barrier. Woodstep has a high compressive strength and creates a fully flat and smooth basis for your wooden floors. Woodstep is suitable for parquet/laminate floorings for domestic and intense commercial use.

Floor type: laminate, parquet

- Includes vapour barrier
- Suitable in combination with floor heating
- Excellent acoustical improvement

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3	11 m x 1 m = ± 11 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
12	17Δlw	0,052	-

Duralay Heatflow 3 mm 114100110



Defintion: A specialist range of low-tog underlays from Duralay that bring a warm glowing feeling to any floor. Duralay Heatflow underlays, all have lower 'tog' ratings, which allow the warmth generated by underfloor heating to pass quickly into the room. They conduct more heat than other underlays, making them the ideal choice for installations with underfloor heating, bringing greater heating efficiency and the potential of reducing heating bills.

Floor type: laminate, parquet

- High-density resilient rubber reduces in-room noise
- Low tog rating makes it ideal for underfloor heating installations with wood and laminate flooring
- Prevents the over-straining of wood and laminate board joints

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3	1,37 m x 11 m = ± 15,07 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	21Δlw	0,035	-

Duralay Multitex 3,6 mm 114100112




Defintion: Sound-reducing underlay. Suitable for floating installation of laminate and wooden floors.

Floor type: laminate, parquet

- Resilient high-density rubber
- Excellent acoustical improvement
- Masks small imperfections in the surface

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	3,6	14,6 m x 0,68 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	23Δlw	0,057	-

Duralay Technics 5 mm 68616

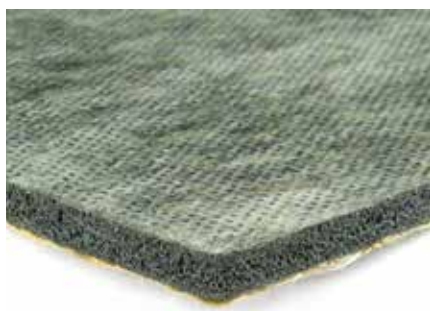

Defintion: The complete solution to contract carpet installation Technics is a high specification twin scrim underlay using the unique Textron® backing to provide exceptional dimensional stability, making it ideal for contract applications.

Floor type: laminate, parquet and carpet

- Durable sponge rubber
- Proven reputation for contract installations
- Suitable for double-stick

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	5	1,37 m x 11 m = ± 15,07 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	29Δlw	0,056	Bfl-S1

Sonixx® Resilient 250 114107816



Defintion: Resilient 250 is a high performing acoustic resilient layer that has been designed to significantly reduce impact sound. It can be used as used as a soft floor covering or as an acoustic underlayment.

Floor type: laminate, parquet, vinyl, carpet tiles, ceramic tiles, linoleum

- Acoustic resilient layer
- Quick and easy to install
- Suitable in combination with floor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2,5	1,37 m x 7,30 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	19Δlw	0,023	Bfl-S1

Whisper Black 1 mm 68835



Defintion: Whisper Black 1 mm is a perforated foam underlay. Suitable for the installation of LVT Rigid(incl.leveling layer). This product is suitable for household and light commercial applications.

Floor type: LVT Rigid

- 10dB underlay for LVT Rigid (incl. leveling layer)
- Perforated foam extremely suitable in combination with underfloor heating
- High pressure resistance to protect the Click connection



Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1	10 m x 1 m = ± 10 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
268	24Δlw	0,0236	Bfl-S1

Black Square 5 mm 62280



Defintion: Black Square 5 mm is a high quality XPS foam underlay. Black Square 5 mm is suitable for floating installation of parquet/laminate floors for household applications. 100% recyclable.

Floor type: laminate, parquet

- Pressure resistant & lightweight
- 100% recyclable
- Improves thermal insulation

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	5	84,5 x 58,5 cm = ± 7,41 m ²	no
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
130	21Δlw	0,192	-

XPS LVT 1,5 mm 68837




Defintion: XPS LVT 1,5 mm is a high density XPS foam underlay with a anti slip layer, has a high compressive strength and creates a fully flat and smooth basis for your LVT Click and laminate floors. XPS LVT 1,5 mm is suitable for domestic and commercial use.

Floor type: LVT Click

- Very high Compressions strength (CS > 400 kPa/m²)
- Anti slip top layer
- Moisture barrier

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	1,5	8,5 m x 1,18 m = ± 10,03 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
400	21Δlw	0,04	Efl

XPS Laminate 2,2 mm 68836

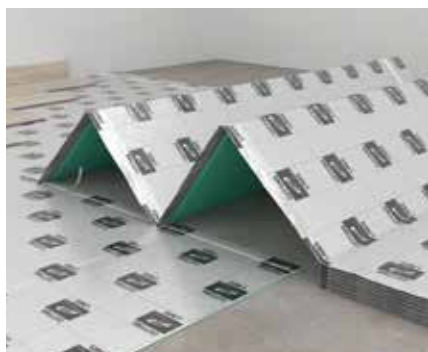

Defintion: XPS laminate 2.2 is a high density XPS foam underlay with a moisture barrier. XPS 2.2 has a high compressive strength and creates a fully flat and smooth basis for your laminate floors. Suitable for laminate floorings for domestic and commercial use.

Floor type: laminate

- High Compressions strength (CS > 90 kPa/m²)
- Moisture barrier
- Suitable in combination with floor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2,2	5,1 m x 1,18 m = ± 7,41 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
90	19Δlw	0,08	Efl

Solidbase 2 mm 68135



Defintion: Solidbase 2 mm is a high density PU-mineral based compound, laminated with moisture barrier. Solidbase 2 mm is suitable for the installation of composite as laminate and wooden floors in both domestic and project area's.

Floor type: laminate, parquet

- Strongly sound reduction
- Moisture barrier (sd >150m)
- Highly resistant to compressive loads and mechanical damage

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2	8 m x 1 m = ± 8 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
250	18Δlw	0,003	Bfl-S1

Solidbase AS 1,6 mm 68136



Defintion: Solidbase AS 1,6 mm is a high density PU-Mineral based compound with an Anti-Slip surface and fire retardant class (Bfl- S1/B1). Solidbase AS 1,6 mm is for the use under Design-LVT Click (full LVT core / not with Rigid board core) in private (NK21-23) and commercial (NK31-32) applications.

Floor type: LVT Click

- A Special Anti-slip layer
- Extremely suitable for underfloor heating and cooling
- Highly resistant to compressive loads and mechanical damage (> 400kPa)

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1,6	8,5 m x 1 m = ± 8,5 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
400	17Δlw	0,009	Bfl-S1

Soundstop 2 mm 68831




Defintion: Soundstop 2 mm is a PE foam. Soundstop 2 mm has a high compressive strength and creates a completely flat and smooth base for your wooden floor. Soundstop 2 mm is suitable for parquet / laminate floors for household use.

Floor type: laminate, parquet

- Stable and easy to install
- Good sound reduction
- Suitable in combination with floor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2	15 x 1 m = ± 15 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
60	19Δlw	0,045	Efl-S1

Soundstop LVT AS 1 mm 68833

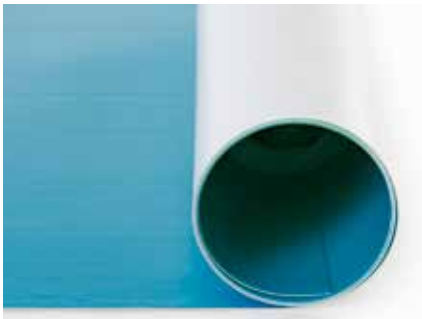


Defintion: Soundstop LVT AS 1mm is a high density PE foam with a anti slip layer. It has a high compressive strength and creates a fully flat and smooth basis for your LVT Click floors. Suitable for LVT Click floorings for domestic and commercial use.

Floor type: LVT Click

- Very high Compressions strength (CS > 999 kPa/m²)
- Anti slip top layer
- Moisture barrier

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1	15 m x 1 m = ± 15 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
999	21Δlw	0,0145	Efl-S1

Soundstop Plus 2 mm 68832

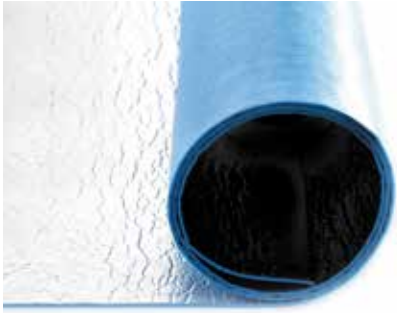

Defintion: Soundstop Plus 2 mm is a PE foam with an aluminum moisture barrier. Soundstop Plus 2 mm has a high compressive strength and creates a completely flat and smooth base for your wooden floor. Soundstop Plus 2 mm is suitable for parquet / laminate floors for household and project use.

Floor type: laminate, parquet

- Stable and easy to install
- Good sound reduction
- Moisture barrier

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2	15 m x 1 m = ± 15 m ²	no
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
56	19Δlw	0,07	Efl-S1

Soundstop Duo 2,2 mm 68841



Defintion: Soundstop DUO 2,2 mm is a PE foam with a high compressive strength

Floor type: laminate

- Stable and easy to install
- Suitable in combination with floor heating
- Moisture barrier

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	2,2	25 m x 1 m = ± 25 m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
-	20Δlw	0,034	-

PE Silver 2 mm 68815



Defintion: PE Silver is a PE foam, laminated with a reinforced aluminium moisture barrier. PE Silver has a high compressive strength and creates a fully flat and smooth basis for your wooden floors.

Floor type: laminate, parquet

- Excellent acoustical improvement
- Suitable in combination with floor heating
- Integrated damp/moisture barrier with 50 mm flap and tape

Basic content	Thickness / mm	Measurement	Underfloor heating
Roll	1,5	15 x 1m = ± 15m ²	yes
CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
10	18Δlw	0,067	-

Black Uni 68825/68826/68827/68840/68824/68828/68829



Defintion: Black Uni is an underlay based on high density PU/Cork granulate. Black uni is a universal product for all types of floor coverings.

Floor type: LVT Rigid, LVT Click, carpet, carpet tiles, laminate, linoleum, parquet, vinyl

- Acoustic underlay with very good sound insulation values
- Underfloor heating suitable
- Both surfaces with anti-slip properties to support Click connections

Art. nr.	Basic content	Thickness / mm	Measurement	Underfloor heating	CS / kPa	Impact sound insulation	Heat resistance	Fire retardancy
68825	Roll	1,5	30m x 1m = ±30 m ²	yes	400	16Δlw	0,02	Efl-S1
68826		2	30m x 1m = ±30 m ²		400	18Δlw	0,03	Efl-S1
68827		3	20m x 1m = ±20 m ²		400	18Δlw	0,04	Efl-S1
68840		5	16m x 1m = ±16 m ²		400	16Δlw	0,07	Efl-S1
68824		1,5	30m x 1m = ±30 m ²		400	16Δlw	0,02	Bfl-S1
68828		2	30m x 1m = ±30 m ²		400	18Δlw	0,03	Bfl-S1
68829		3	20m x 1m = ±20 m ²		400	18Δlw	0,04	Bfl-S1



Egalfloor Fini 5 mm 62072



Defintion: Egalfloor fini is a durable bitumen wood fibre board of pine trees, suitable for the installation of floating vinyl in domestic areas.

Floor type: vinyl

- Strong equalization capacity
- Loadable immediately after installation
- Suitable in combination with underfloor heating

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	5	800 x 570 mm	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
300	18Δlw	0,071	Efl-S1

Egalfloor 5 mm 62081



Defintion: Egalfloor 5 mm is a high-quality softboard made of softwood.

Floor type: laminate, parquet

- Strong equalization capacity
- Loadable immediately after installation
- Quick and easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	5	790 x 590 mm	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
250	18Δlw	0,071	Efl-S1

Egalfloor 4 mm 62080



Defintion: Egalfloor 4 mm is a high-quality softboard made of softwood.

Floor type: laminate, parquet

- Strong equalization capacity
- Loadable immediately after installation
- Quick and easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	4	790 x 590 mm	yes
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
250	18Δlw	0,071	Efl-S1

Egalfloor Classic 7 mm 620612



Defintion: Egalfloor Classic is a high quality softboard of softwood suitable for parquet/laminate & carpet installation for domestic use.

Floor type: carpet, laminate, parquet

- Strong equalization capacity
- Loadable immediately after installation
- Quick and easy to install

Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	7	850 x 590 mm	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
250	19Δlw	0,1	Efl-S1

Egalfloor 10 dB 10 mm 62167



Defintion: Egalfloor 10 dB is a high-quality softboard made of 100% softwood with a special top layer. It is suitable for parquet and laminate floors for domestic use.

Floor type: laminate, parquet


- Strong equalization capacity
- Loadable immediately after installation
- Very good impact sound insulation; meets the requirements for impact sound reduction of 10dB ΔLlin often set by the Association of Owners (VvE).



Basic content	Thickness / mm	Measurement	Underfloor heating
Plates	10	790 x 590 mm	no
Density kg/m ³	Impact sound insulation	Heat resistance	Fire retardancy
250	21Δlw	0,13	Efl-S1

Non-slip carpet underlay

Rugs and carpets bring warmth and character to a living environment. We also see them more and more in companies. But nothing is more annoying than that it starts to slide unexpectedly. Or even worse, that someone trips over it because a corner has turned. To prevent these problems, we offer a good and easy solution; an anti-slip underlay

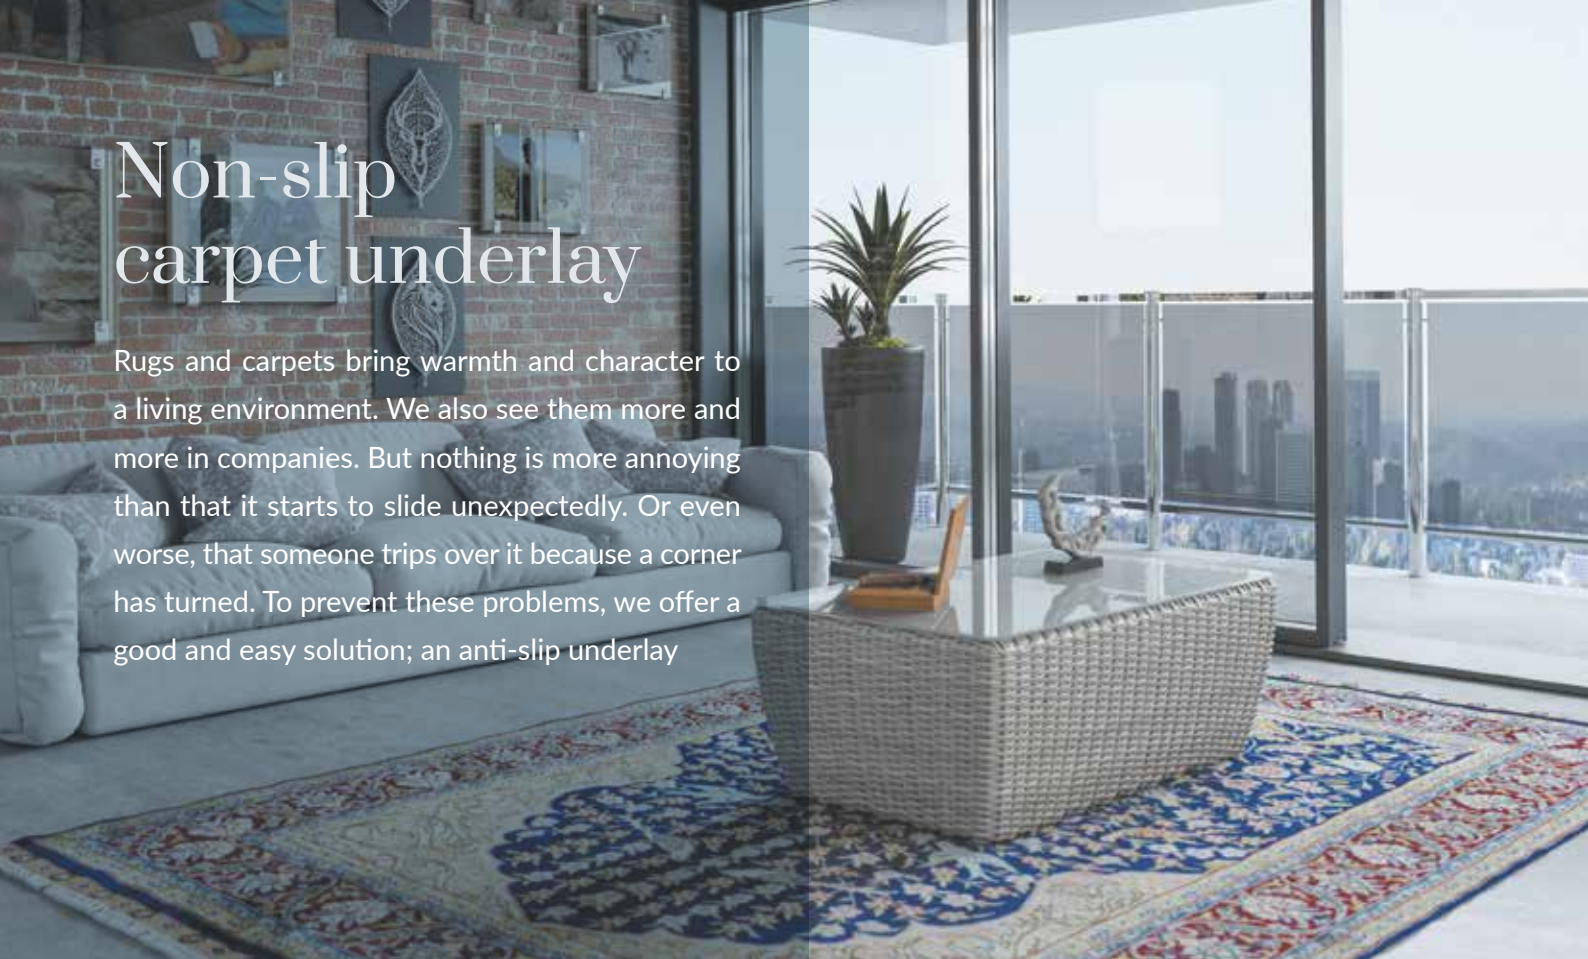

The advantages of an anti-slip carpet underlay:

- Suitable for underfloor heating
- 100% recyclable
- Longer life span of carpet and rug

Luxerton Standard 2 mm 68076 / 68077 / 68071 / 68072 / 68073 / 68074 / 68075



Defintion: Luxerton Standard is an non skid rug underlay for under rugs, produced out of a latex impregnated needle felt, suitable for application on parquet, laminate, ceramic tiles, cork and LVT.

Floor type: rugs

- Light weight and easy to install
- Levels out small irregularities in the subfloorLevels out small irregularities in the subfloor
- Suitable in combination with floor heating

Art. nr.	Weight / mm ²	Thickness / mm	Measurement rol	Underfloor heating	Heat resistance
68076 68077 68071 68072 68073 68074 68075	150	2	40m x 1m = ± 40m ² 40m x 2m = ± 80m ² 60cm x 130cm = 27,30m ² (35 pieces per box) 130cm x 190cm = 34,58m ² (14 pieces per box) 160cm x 230cm = 36,80m ² (10 pieces per box) 190cm x 290cm = 38,57m ² (7 spieces per box) 240cm x 340cm = 40,80m ² (5 pieces per box)	yes	0,06

Luxerton Supreme 3 mm 67910 / 67911 / 67960 / 67961 / 67962 / 67964



Defintion: Luxerton Supreme is a lightweight non-slip underlay made from a high quality needle felt with a double-sided latex non-slip coating. The rolls are provided with a foil. Creates a comfortable reliable solid base and prevents dangerous creeping up of carpet. Contains no plasticizers and is applicable to carpet, parquet, laminate, ceramics, cork, LVT and is suitable for domestic and project use.

Floor type: rugs

- Light weight and easy to install
- Levels out small irregularities in the subfloor Levels out small irregularities in the subfloor
- Suitable in combination with floor heating

Art. nr.	Weight / mm ²	Thickness / mm	Measurement rol	Underfloor heating	Heat resistance
67910 67911 67960 67961 67962 67964	250	3	30m x 1m (30m ²) 30m x 2m (60m ²) 60cm x 130cm (19,50m ²) 25x 130cm x 190cm (19,76m ²) 8x 160cm x 230cm (18,40m ²) 5x 190cm x 290cm (22,04m ²) 4x	yes	0,06

Antislip PES felt 1,5 mm 68234 / 68235 / 68236



Defintion: Antislip PES felt is made of 100% polyester with acrylic anti-slip adhesive for industrial applications under carpets.

Floor type: rugs

LVT, LVT Click, carpet, carpet tiles, vinyl

- Shrink free, permanent anti-slip, underfloor heating suitable
- Volume of carpets / festooning
- Production on demand

Art. nr.	Weight / mm ²	Thickness / mm	Measurement	Underfloor heating	Heat resistance
68234 68235 68236	0,127 0,62 0,36	1,5 5 3	300m x 3m = 900m ² 100m x 3m = 300m ² 160m x 3m = 480m ²	yes	0,06

Universal Stop 2,5 mm 68022 / 68023 / 68030 / 68032 / 68047 / 68048 / 68049 / 68050




Defintion: Universal Stop is an non-slip rug underlay for under rugs, produced out of a recycled polyester, suitable for application on wall to wall carpet, parquet, laminate, ceramic tiles, cork and LVT. This light weight rug underlay does not contain any softeners and creates a good and solid base for any rug and emphasize the luxury and comfort of the rug. Universal Stop is suitable for domestic and commercial use.

Floor type: rugs

- Lightweight and easy to install
- Evens out small imperfections in the base floor
- Environmentally friendly produced & 100% recyclable

Art. nr.	Weight / mm ²	Thickness / mm	Measurement rol	Underfloor heating	Heat resistance
68022 68023 68030 68032 68047 68048 68049 68050	240	2,5	160cm x 230cm = 25,76m ² 190cm x 290cm = 27,55m ² 130cm x 190cm = 19,76m ² 240cm x 290cm = 20,88m ² 50m x 0,9m = 45m ² 50m x 1,50m = 75m ² 50m x 1,80m = 90m ² 50m x 2,00m = 100m ²	yes	0,06

Rug anti-creep 68311

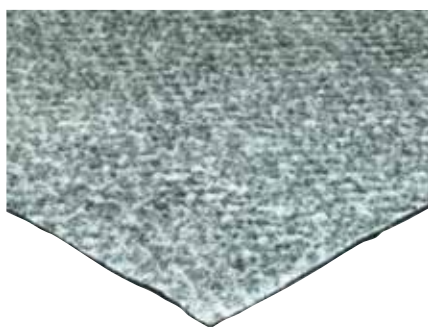

Defintion: Non-slip underlay, keeps carpet in place and increases safety

Floor type: rugs

- No stains or adhesive residues
- Verlengt de levensduur van het tapijt
- Suitable in combination with floor heating

Weight / mm ²	Thickness / mm	Measurement	Underfloor heating	Heat resistance
240	2,5	25m x 1m = 25m ²	yes	-



Roberts tools
and accessories
the brand that stands
for quality!



Color-coded bullets are mentioned with the tools.

These tools are suitable for:

- LVT, wood and laminate
- Carpets



Scan this code
and discover our
Roberts tools webshop



When installing a floor and an underlay, you also like to use the right tools, don't you? Each type of floor covering requires specialist tools. Estillon has professional Roberts tools and accessories in its range for all those different types of floor covering.

A complete collection of floor installation tools, various types of tape, aluminum profiles, Smoothedge carpet slats and adhesives.

Roberts is an American brand of quality tools for the floor installer. Roy Roberts invented the carpet gripper and knee tensioner in 1938. After that, the range expands with more tools for carpet installation. For over 80 years, Roberts has been a premier brand of carpet installation tools, adhesives and accessories.

Moisture barrier 160 µm 100 m² 69780



Defintion: The vapor/moisture barrier is made of 100% blue polyethylene. The smooth surface and color make it easy to distinguish the moisture barrier from the original subfloor. The moisture-resistant film is completely moisture resistant according to the standard of the EPLF.

Contents: 2 x 50 m



Moisture barrier 160 µm 22,5 m² 69781




Defintion: The vapor/moisture barrier is made of 100% blue polyethylene. The smooth surface and color make it easy to distinguish the moisture barrier from the original subfloor. The moisture-resistant film is completely moisture resistant according to the standard of the EPLF.

Contents: 4,5 x 5 m



LVT Strip Cutter 330 mm max. 16 mm MD-330

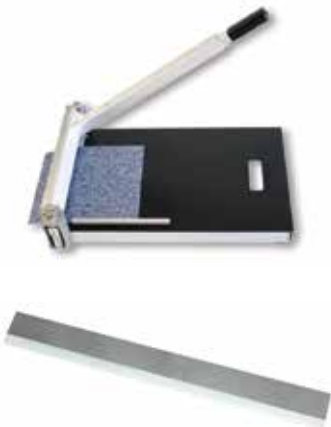

Defintion: For fast, precise and dust-free cutting of LVT strips and tiles, carpet and vinyl tiles. Blade width 330 mm (chisel ground), material thickness max. 16 mm.

Contents: 1



Spare blade for MD 330 MH-330 BLADE

Defintion: Spare blade for MD 330 and MH-330.

Contents: 1



LVT Strip Cutter LT-330



Defintion: LVT Strip Cutter 328 mm max. 5.5 mm.

Contents: 1



Roberts Laminate Cutter 220mm LX-80



Defintion: Accurate and powerful laminate cutter.

Contents: 1




Spare blade for LX-80 - 220 mm LX-80 BLADE

Defintion: Spare blade for LX-80 - 220 mm.

Contents: 1



Laminate Cutter Knife XP-215

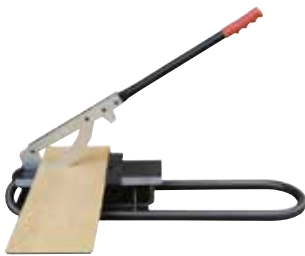

Blade: 215 mm

Metrial thickness: max. 12 mm

Weight: 7,5 kg

Contents: 1



Laminate leverage cutter FLR-33 cm R10902



Defintion: With metal sheathed bearings for smooth and powerful work.

Reinforcements in power transmission, handle and frame make the leverage cutter more powerful and user-friendly. .

Weight: 9 kg

Contents: 1



Vinyl Strip Cutter 300 mm R10900



Defintion: Vinyl strip cutter 300 mm.



Upper blade with bolts for R10900 R1090005

Defintion: Upper blade with bolts for R10900.

Contents: 4,5 x 5 m



Bottom blade with bolts for R10900 R1090006

Defintion: Bottom blade with bolts for R10900.

Contents: 1



LVT Strip Cutter R10925



Defintion: LVT strip cutter with infinitely adjustable stop from 40 to 100 mm.

Contents: 1



Spare blade for strip cutter R10926

Defintion: Spare blade for Strip cutter R10925.

Contents: 100



Strip cutting king R10927



Defintion: Strip cutter for large-format design shelves and tiles.

Contents: 1



Spare blade for strip cutting king R10928

Defintion: spare blade for strip cutting king R10927.

Contents: 100



Loop pool carpet cutter with base Deluxe R10152



Defintion: Carpet cutter with base for carpet with textile backing. Contains 2 blades that are used separately to cut short-term pole insert. Height adjustable. Blade R10164.

Contents: 3



Seam cutter Roberts R10146



Defintion: Cuts perfect seams in all types of textile floor coverings. With 2 separately used blades for tight cutting. Blade R10164.

Contents: 3



Spare Slot blade 0,35 mm R10164

Defintion: For cutters R10152 and R10146.

Contents: 10 x 10



Universal carpet cutter green R10207



Defintion: Universal carpet cutter for different types of floor covering blade R10385.

Contents: 1



Special blade for R10207 R10385

Defintion: Special blade for R10207

Contents: 10 x 10



Universal carpet cutter red R10208



Defintion: Universal carpet cutter for carpet with sturdy back

Contents: 1



Special blade for R10208 R10386

Defintion: Special blade for R10208

Contents: 10 x 10



Carpet edge cutter deluxe R10616



Defintion: Carpet edge cutter. For fitting along the plinth of tensioned carpet. Fully adjustable. Special blade: R10444.

Contents: 2



Special blade for R10616 R10444

Defintion: Special blade for R10616

Contents: 10 x 10



Roberts GT carpet edge cutter R10617



Defintion: Cuts accurately along the wall and under the plinth. Equipped with a double steel knife clamp that secures the blades and prevents them from loosening. Adjustable blade height, reinforced triple welded blade guide, double-layer spring steel blade clamps, six handle positions for optimal leverage. Unique design with two blades for left and right cutting.

Contents: 1



Blade for R10617 R10445

Defintion: Size 5,53 cm x 0,43 mm. Blade for R10617

Contents: 10 x 10



Allegro knife with tube R10632



Defintion: Allegro knife with tube / incl. 5 blades.

Contents: 1



Delphin knife with tube R10633



Defintion: Knife with plastic holder, opening without tools. Can be used in combination with: standard trapezoidal knife (R15362) and trapezoidal knife Long (R15363).

Contents: 1



Universal blade for break-off blades R10643



Defintion: Can be used in combination with replacement break-off knife (R10644).

Contents: 1



Break-off blade 18 mm R10644



Defintion: Universal break-off replacement knives. Can be used in combination with most do-it-yourself handles for chipping knives, such as the universal knife (R10643).

Contents: 10 x 10



Concave blades 0,65 mm R10390



Defintion: Concave blade. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Trapezoidal blades 0,65 mm R15362



Defintion: Standard trapezoidal blade. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Trapezoidal blades long 0,65 mm R15363



Defintion: Standard trapezoidal blade. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Small crochet blade 0,65 mm R15372



Defintion: Small crochet blades. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Small crochet blades Tungsten steel 0,65 mm R15373



Defintion: Tungsten steel small hook knife. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Large crochet blades 0,65 mm R15374



Defintion: Large hook replacement knives. Can be used in combination with most handles, such as the Delfin knife (R10633) and Allegro knife (R10632).

Contents: 10 x 10



Roberts Linoleum knife R10931



Defintion: Linoleum knife.

Contents: 12



Linoleum Welding Wire Trimmer R10165



Defintion: For cutting linoleum welding wire.
Linoleum welding wire trimmer knife guide.

Contents: 1



Spare guide 0,5 mm for R10165 R10167

Defintion: Linoleum welding wire trimmer blade guide.

Contents: 1



Spare blade for R10165 R10166

Defintion: Linoleum welding wire trimmer spare blade

Contents: 5



Short scriber R10930



Defintion: For cutting linoleum and LVT with a max. Working range of 56 mm.
Materials up to 8 mm, total length 100 mm.

Contents: 1



Long scriber 385 mm R10933



Defintion: For cutting linoleum/LVT, incl. 10 write-offs and 3 blades.

Contents: 1



Pool scissors R586



Defintion: With these poolscissors you can effortlessly cut loose threads or poles from different types of carpet.

Contents: 3



Pool scissors large model 8 inches - 20 cm R10121



Defintion: With these pool scissors you can effortlessly cut loose wires or poles of different types of carpet, large model - 20 cm.

Contents: 6



Roberts Carpet Scissors 25 cm - left-handed R10124



Defintion: Double hardened steel, 25 cm left-handed.

Contents: 3



Roberts Carpet Scissors 25 cm - right-handed R10123



Defintion: Double hardened steel, 25 cm right-handed.

Contents: 6



Roberts Carpet Scissors 30 cm - right handed R10125



Defintion: Double hardened steel, 30 cm right-handed.

Contents: 3



Super carpet scissors R363



Defintion: 25 cm carpet scissors, effortless cutting of different types of carpet. Mitre scissors for cutting sticky skirting boards, both mitre and straight.

Contents: 1



Roberts Mitre scissors R573



Defintion: Mitre scissors for cutting sticky skirting boards, both mitre and straight.

Contents: 1



Blade and Anvil for R573 R57312

Defintion: Blade and anvil for mitre scissors R573.

Contents: 1



Seam clamp R10116



Defintion: Seam clamp for keeping welded or pasted carpet seams closed.

Contents: 12



Lockable seam/tensioner R10128



Defintion: Can be used as a seam tensioner with 2 tension heads. Each tension head is equipped with 6 sets of fine teeth and adjustable large tooth plate. Can be used as a tension tensioner with curved pull blade. Comes in sturdy plastic case. With voltage locking on the tensioning head.

Contents: 2



Power-Lok Tube tensioner GT in case R10254A



Defintion: Power-lok tube tensioner GT Carpet tensioner with swivelling, low-profile tensioning head and tension lock in the handle to hold the tension on the carpet. With 4 aluminum extension tubes, packed in plastic trolley case.

Contents: 1



Aluminium tube for tube tensioner 0,92 m R1023510

Defintion: Extension tube lightweight aluminum tube (extendable up to 1.50 mtr). For R10254A.

Contents: 1



Gel Pro Adjustable kneekicker R10505



Defintion: Adjustable, 100% gel core pad at a 5° angle, unique pin design for easy adjustments to depth, convenient button to adjust the length of the kneekicker.

Contents: 2



Fine teeth for R10505 R1050513

Defintion: Fine teeth for optimal adjustment to the floor covering.

Contents: 3



Coarse tooth plate for R10505 R1050514

Defintion: Coarse teeth for optimal adjustment to the floor covering.

Contents: 1



Pad for R10505 R10505200



Defintion: Pad for R10505

Contents: 1



Deluxe Adjustable Kneekicker GT R10422



Defintion: With this knee kicker you have the ideal tools to fit your new carpet into your room.

Contents: 1



Fine teeth for R10422 R41203

Defintion: Fine teeth for all knee kickers.

Contents: 3



Coarse tooth plate for R10422 R50007

Defintion: Fine teeth for all knee kickers.

Contents: 1



Pad Extra thick for R10422 R42209

Defintion: Pad extra thick for R10422

Contents: 1



Deluxe adjustable kneekicker R10412



Defintion: With this knee kicker you have the ideal tools to fit your new carpet into your room.

Contents: 2



Adjustable kneekicker R362




Defintion: With this kneekicker you have the ideal tools to fit your new carpet into your room.

Contents: 1



Smoothedge carpet gripper standard, short slats (25 mm x 5 mm) R346




Defintion: Pre-Cut carpet gripper without nail for bonding to concrete and wood. Adhesive Advise: Ankerweld PU Conctruction Adhesive (R6040)

Contents: 500



Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
0,304	5	2	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
25	-	500	-

Smoothedge carpet gripper Hercules, extra wide (42 mm x 4 mm) R142

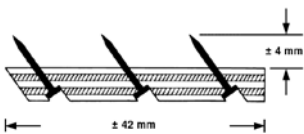


Defintion: For bonding to concrete and wood. The additional row of pins deliver better grip combined with an extra wide plywood base for better power distribution. Recommended for long stretch fits of 10m / 30ft or more.

Contents: 50



Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,22	4	3	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
42	-	50	-

Smoothedge carpet gripper standard (25 mm x 5 mm) R340




Defintion: Standard carpet gripper without nail for bonding to concrete and wood. Adhesive Advise: Ankerweld PU Conctruction Adhesive (R6040)

Contents: 100



Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,524	5	2	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
25	-	100	-

Smoothedge Tri-Tack carpet gripper (30 x 4 mm) R240

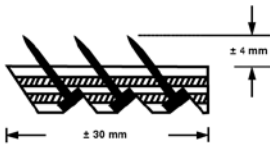


Defintion: For bonding to concrete and wood. The extra row of pins delivers better grip in combination with an extra wide base of plywood for better power distribution. Recommended for tensioning over large lengths.

Contents: 70

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,22	4	3	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
30	-	70	-

Smoothedge carpet gripper pre nail (20 mm x 5 mm) R190

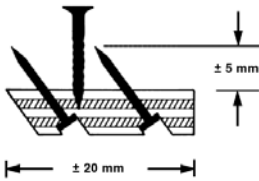


Defintion: Standard carpet gripper with combi nail for wood and concrete.

Contents: 100

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	5	2	yes
Width slats in mm	With nail	Number slats per box	Basefloor Wood
20	yes	100	yes

Tackfast gripper SD stick down/med. pin (24,3 mm x 4,8 mm) R348


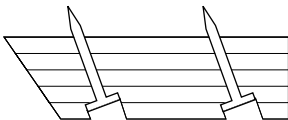


Defintion: Stick down Tackfast is ideal for use on modern wooden staircases where fixing by nails is unsuitable. It is ideal for applications where special fixing methods are required.

Contents: 100

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	4,8	2	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
24,3	-	100	-

Tackfast gripper WD stick down/med. pin (24,3 mm x 4,8 mm) R351

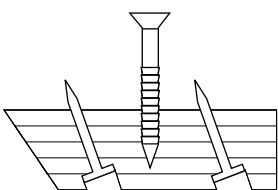


Defintion: Stick down Tackfast is ideal for use on modern wooden staircases where fixing by nails is unsuitable. It is ideal for applications where special fixing methods are required.

Contents: 100

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	4,8	2	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
24,3	yes	100	yes

Contract gripper/concrete medium pin (24,3 mm x 4,8 mm) R349

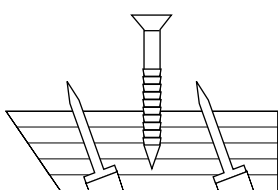


Defintion: For particularly heavy stretch installations. It is 42 mm wide and has 3 rows of carpet holding pins. Medium pin height with no floor nails. Allows the fitter to install by nailing or adhering the gripper to the floor, depending on the installation.

Contents: 100

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	4,8	2	yes
Width slats in mm	With nail	Number slats per box	Basefloor Wood
24,3	yes	100	-

Standard gripper WDMP (20 mm x 4,8 mm) R357

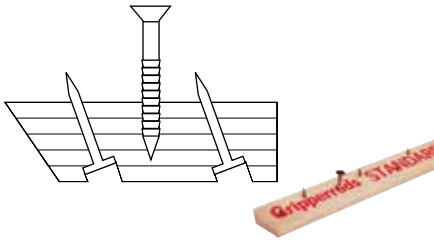


Defintion: Pre-nailed for ease and speed of installation when fitted to boarded or suspended timber floors, with specially tempered nails (threaded for holding power), pre-driven into the gripper.

Contents: 100

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	4,8	2	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
20	yes	100	yes

Tackfast gripper SD LP (42 mm x 6,4 mm) R367

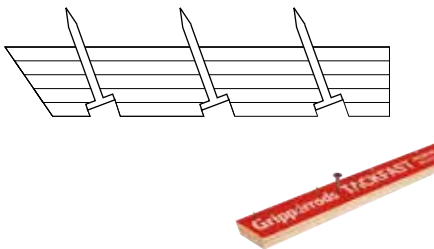


Defintion: Stick down Tackfast is ideal for use on modern wooden staircases where fixing by nails is unsuitable. It is ideal for applications where special fixing methods are required.

Contents: 50

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	6,4	3	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
42	-	50	-

Contract gripper medium pin (42 mm x 4,8 mm) R347

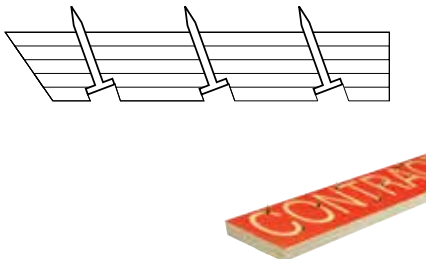

Defintion: A specialist gripper for particularly heavy stretch installations. It is 42 mm wide and has 3 rows of carpet holding pins. Medium pin height with no floor nails. Allows the fitter to install by nailing or adhering the gripper to the floor, depending on the installation.

Contents: 50

Length slats in m	Hight pin in mm	Number of pins per slat	Basefloor Concrete
1,52	4,8	3	-
Width slats in mm	With nail	Number slats per box	Basefloor Wood
42	-	50	-

Roberts Linoleum roller 17 kg R10943



Defintion: Linoleum roller 17 kg with 3 metal rollers. Width: 40 cm.

Contents: 1



Roberts Linoleum roller 34 kg R10945 / Roberts Linoleum roller 45 kg R10944



Defintion: Linoleum roller 34 kg with 3 metal rollers. Width: 40 cm.

Linoleum roller 45 kg with 3 metal rollers. Width: 40 cm.

Contents: 1



Extendable hand roller R10955



Defintion: Extendable hand roller with 3 rubber rollers.

Length 40-70 cm

Width 19 cm

Contents: 1



Loop Pile carpet Seam Roller R10169



Defintion: Carpet seam roller for loop pile carpet.

Contents: 1



Carpet seam roller for cut pile R10170



Defintion: Carpet seam roller for cut pile.

Contents: 1





Heatbond carpet welding machine R10483 G



Defintion: Heatbond carpet welding machine cool shield incl. coaster - 1.000 W. With thermostat control, continuously adjustable from 65-220°C. Ribbed Teflon base plate.

Contents: 1



Heatbond tape Low profile paper 20 m R50850



Defintion: The Low profile paper ensures easy removal of the paper carrier. This guarantees easy processing when creating by pattern.

Contents: 10 x 20 m



Heatbond tape Multiline 50 m R50550



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. Application light use (living/bedroom).

Contents: 4 x 50 m



Heatbond tape Multiline 20 m R50313



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. Application Light use (living room/bedroom).

Contents: 10 x 20 m



Heatbond tape Golden 50 m R50650



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. With a custom hotmelt and heavier fabric than the Multiline quality.

Contents: 4 x 50 m



Heatbond tape Golden 20 m R50315



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. With a custom hotmelt and heavier fabric than the Multiline quality.

Contents: 10 x 20 m



Heatbond tape Super golden 50 m R50750



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. The gold foil ensures even better conduction and distribution of heat. This, in combination with a heavier adhesive layer, guarantees the strongest possible adhesion.

Contents: 4 x 50 m



Heatbond tape Super Golden 20 m R50330



Defintion: Heatbond carpet seams welding tape. Hot melt glue on heat-resistant fiberglass/cotton carrier, with protective paper backing. The gold foil ensures even better conduction and distribution of heat. This, in combination with a heavier adhesive layer, guarantees the strongest possible adhesion.

Contents: 10 x 20 m



Lasband Dispenser Super Golden R50450



Defintion: Heatbond carpet welding machine

Contents: 2 x 30,48 m



Heat Seam Iron R10485



Defintion: Heatbond carpet welding machine


Contents: 1



Heat seaming tape Standard 20 m R50340

Defintion: Heatbond carpet seams welding tape specially designed for use with the super heat seam iron.

Contents: 10 x 20 m

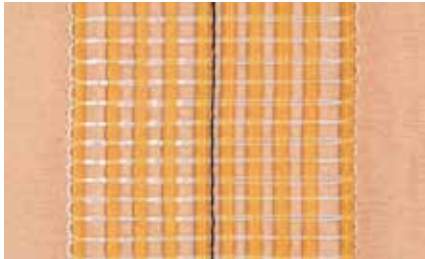

Seamwell heat seaming tape 20 m R50350

Defintion: This tape provides an adhesive formula and weight designed for high-traffic installations and especially for more difficult backings. The adhesive is specially designed for stiffer backings with uneven texture.

Contents: 10 x 20 m



Heat seaming tape Seamwell Flat 2 100 m R50352

Defintion: This tape provides an adhesive formula and weight designed for high-traffic installations and especially for more difficult backings.

Contents: 2 x 100 m



Heat seaming tape Goldline 20 m R50351

Defintion: Heatbond carpet seams welding tape. The gold foil ensures even better conduction and distribution of heat. This, in combination with a heavier adhesive layer, guarantees the strongest possible adHeatbond carpet seams welding tape. The gold foil ensures even better conduction and distribution of heat. This, in combination with a heavier adhesive layer, guarantees the strongest possible adhesion.

Contents: 10 x 20 m





Upholstery hammer R10513



Defintion: Upholstery hammer for smashing (ornamental) nails. Upholstery hammer has a small impact surface and a large weight, which makes securing nails easier than with a regular hammer Weight 300 gr. Head diameter 15 mm.

Contents: 1

Upholstery hammer full steel R10511



Defintion: Upholstery hammer full steel, for smashing (ornamental) nails. Upholstery hammer has a small impact surface and a large weight, which makes securing nails easier than with a regular hammer. Head diameter 18 mm.

Contents: 1

Rubber hammer, white 560 g R10514



Defintion: Does not leave prints. Also ideal for knocking on the door of anodized profiles. Size 2, ø 64 mm.

Contents: 1

Veneer hammer 500 g R10512



Defintion: With 90 mm grab fin, forged, sharpened and lacquered in one piece. Fixed ash grip.

Contents: 1

Recoil-free hammer Secural 680 g R0515



Defintion: Head size 30 x 40 mm. Impact surface made of medium hard polyurethane. Recoil-free for effortless work. Robust grip with rubber grip.

Contents: 1

Roberts claw hammer R10516



Defintion: 35 cm sturdy, high-quality hickory construction. The long straight claw is ideal for removing carpet slats. 565 grams cup. Preformed handle provides optimal strength and minimizes stroke impact.

Contents: 1

Hand sandblock R10618



Defintion: Velcro hand sanding block made of PU elastomer foam for conventional velcro sanding discs with a diameter of 150 mm. Resistant to oil and aging and tear resistant.

Contents: 1

Sandstone with handle R10615



Defintion: For sanding various surfaces, such as rough floors. Grain 24.

Contents: 1

Tungsten carbide sanding plate K24 R10614



Defintion: With wide, ergonomic handle for high abrasion pressure. High abrasion performance due to excellent grain. 110 x 220 mm.

Contents: 1

Cork rubbing board 30 cm wide R10619



Defintion: A block of pressed cork around which sandpaper is wrapped. 30 cm wide.

Contents: 1

Magnetic nail driving bar R10151



Defintion: Magnetic nail driving bar. For attaching carpet slats to places that are difficult to reach.

Contents: 1



Roberts stop block R10178



Defintion: Laying attachment for laying floors- for knocking laminate and parquet.

Contents: 1



Roberts Professional Pull Bar R10188




Defintion: This Pull bar makes it possible to close the openings and joints of the laminate floor without causing damage. Can be used in combination with all brands of laminate, parquet and solid wood floors to create space between the wall and tight spaces.

Contents: 1



Roberts laminate installation set R1026

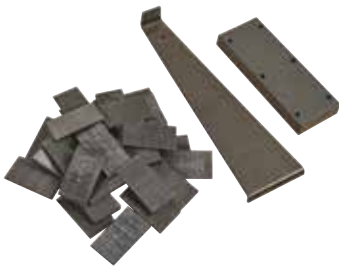

Defintion: Installation set for laminate Contents.: 30 spacers, stop block and knock block and floor pull rod.

Contents: 1



Pulling claw R10277



Defintion: Aids in removing glued floor covering. The unique design ensures maximum pulling power.

Contents: 1



Heavy floor/wall scraper 30 cm R10194



Defintion: Heavy floor/wall scraper 30 cm. With the floor scraper you remove glue residue from the soil, as well as other irregularities.

Contents: 1

Heavy floor/wall scraper 45 cm R10294



Defintion: Heavy floor/wall scraper 45 cm. With the floor scraper you remove glue residue from the soil, as well as other irregularities.

Contents: 1



Spare blade for R10194 and R10294 R10195

Defintion: Spare blade

Contents: 10

Heavy floor scraper R10296



Defintion: Heavy floor scraper extendable from 97 - 170 cm. With turn/clamp mechanism. With the floor scraper you remove glue residue from the soil, as well as other irregularities.

Contents: 2

Heavy floor/wall scraper 10 cm R10191



Defintion: With the floor scraper you remove glue residue from the soil, as well as other irregularities.

Contents: 1

Heavy duty brutus scraper R10960



Defintion: With the floor scraper you remove glue residue from the soil, as well as other irregularities.

Contents: 3


Square 1000 mm x 500 mm R10924



Defintion: With the square you can set right angles or check corners for angledness. Polished steel shopping hook. 30 mm wide. Afm. 100 x 50 cm.

Contents: 1

Spare blade Jumbo Stripper R10293

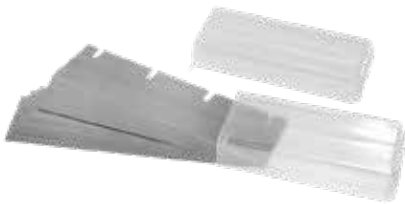

Defintion: 210 x 1.5 mm, hardened, for Jumbo Stripper and many other devices in this class.

Contents: 10

Chalk reel 15 m R10303



Defintion: For trouble-free marking of straight lines on floors and walls.

Contents: 12

Chalk refill R10324



Defintion: Chalk refill blue for use with the lime line R10303. Blue 45 gr.

Contents: 12

Chalk refill R10321



Defintion: Chalk refill white for use with the chalk line R10303. white 227 gr.

Contents: 12

Safe tuck nylon carpet tucker R10522



Defintion: For finishing carpet behind carpet slats or at stair edges. Nylon carpet drevel 9 cm wide.

Contents: 4

Carpet strip 9 cm wide R521



Defintion: For finishing carpet behind the risers or at stair edges.

Contents: 3

Trowel 28 cm, stainless steel R522



Defintion: With a comfortable handle.

Contents: 1

Trowel 40 cm, stainless steel R523



Defintion: Stainless steel with curved wooden handle.

Contents: 1

Straight edge 210 cm x 8 cm R10919



Defintion: For plotting straight lines on the floor. Also used to make nice tight cuts in the floor covering. Rollable, slightly vaulted. Lies stable and straight on the surface. Stainless steel.

Contents: 1

Straight edge 410 cm x 8 cm R10920



Defintion: For plotting straight lines on the floor. Also used to make nice tight cuts in the floor covering. Rollable, slightly vaulted. Lies stable and straight on the surface. Stainless steel.

Contents: 1

Staircase gauge in wooden box R10921



Defintion: With the staircase gauge you can quickly and very accurately measure the sizes and shapes of the steps and then draw them over to the (new) floor coverings. The 6 different arms are aligned and attached to the vertices of the step. Each 2 arms 600 mm, 800 mm, 1000 mm.

Contents: 1

Vitrex Power Mixer Dual Peddle 1650W R1066 DP



Defintion: Twinpaddle electric mixer 230V - 1650W. With 2 mixers to mix heavy material faster and more efficiently. Mixers rotate in opposite directions. Electronically controlled variable speed from 100 – 600 T/min.

Contents: 1

Staple hammer R10109



Defintion: For fastening carpet, foil, cardboard. Durable stamped steel, comfortable vinyl grip and easy to refill.

Contents: 1

Pool awl R10517



Defintion: Highlights and opens pool of carpets for easy cutting.

Contents: 6



Kit gun universal 320 ml R6013



Defintion: For processing sealant or glue. For 320 ml cartridges and up to 400 ml tubes.

Contents: 1

Carpet Pen Red R691



Defintion: With a large head for attaching the beginning of the carpet.
Mushroom head ø3 cm, length 8 cm, stainless steel needle

Contents: 50



Wedge R60440



Defintion: For the correct distance to the walls

Contents: 40

Roberts Toolbag R722



Defintion: Large model with insert pockets on the inside and outside and sturdy shoulder strap. Size: 57 x 22 x 30 cm

Contents: 1

Moisture meter Cmex2 R10700



Defintion: Digital moisture meter for instant and accurate measurement of moisture content in concrete and other floors.

Contents: 1

Hygro meter for Cmex2 R10701



Defintion: Hygro meter to be used in combination with moisture meter, Cmex2.

Contents: 1

FloorFit 521 polisher R9300



Defintion: Suitable for grinding, cleaning and care work. Working width 400 mm. 230 V-1200 W – 39 kg. 1200 x 542 x 452 mm

Contents: 1



Powerboard for FloorFit 521 R93002

Defintion: Made of foam rubber for sandpaper discs of 400 mm

Contents: 1



Padholder for FloorFit 521 R93001

Defintion: Pad holder for Floorfit 521 polisher

Contents: 1



Grinding wheel 400 mm K12 for Floorfit 521 polisher R9300 R93003

Defintion: Grinding wheel dps 400 mm

K12 for R9300-Floorfit 521polisher

Contents: 10



Grinding wheel 400 mm K24 for Floorfit 521 polisher R9300 R93004

Defintion: Grinding wheel dps 400 mm

K24 for R9300-Floorfit 521polisher

Contents: 10



Grinding wheel 400 mm K36 for Floorfit 521 polisher R9300 R93005

Defintion: Grinding wheel dps 400 mm

K36 for R9300-Floorfit 521polisher

Contents: 10

Ronda 200 H industrial vacuum cleaner R9310



Defintion: For fine and health-endangering dust. 230 V-1100 W – 15 kg.

Contents: 1



Filter bag for Ronda 200 H industrial vacuum cleaner 93101

Defintion: Filter bag made of strong polyester fleece

Contents: 1

Roller conveyor trolley R9320



Defintion: With this highly manoeuvrable trolley, even heavy rollers can be transported. Length 120 cm, total width 65 cm, height 55 cm. With large pneumatic tires ø 40 cm. Load capacity 400 kg.

Contents: 1

Paint roller 25 cm R93401



Defintion: Made of 20 mm long Vestan mesh fabric. For 8 mm roller.

Contents: 50

Paint roller bracket 25 cm R9340



Defintion: For paint rolls 25 - 27 cm with 8 mm mortise system. The hard plastic handle fits on a broomstick.

Contents: 10

Telescopic handle Profi-Click 130-238 cm R93402



Defintion: Length adjustment with release button. Cone with locking cam for paint roller. Protected against the ingress of paint, glue or leveling agent. Non-slip handle.

Contents: 1

Wet/dry vacuum cleaner 15 L R9311



Defintion: Power: 1000 W, capacity 15 L., stainless steel reservoir, 7.2 m. cable.

Contents: 1

Roberts knee pads R9337



Defintion: Soft, non-pinching wide straps that hold the knee pads in place. Padded upper strap specially designed for knee bending.

Contents: 6

Mini saw battery 18V EC-18V



Defintion: Mini saw is suitable for light professional work.

Contents: 1

Hand Seams gouge R32536



Defintion: Hand seam gouge adjustable milling depth. Incl. 3 blades.

Contents: 1

Crowbar 30 cm R510



Defintion: A robust crowbar of 30 cm.

Contents: 1

Tungsten Steel Saw Blade 18TCT



Defintion: Tungsten Steel Saw Blade - 50,8 mm.

Contents: 1

Roberts tape measure R10140



Defintion: The roller size is just about the starting point for every handyman. This allows you to easily measure longer distances.

Contents: 1

Latex glue 12 x 500 ml R330A



Defintion: Solvent-free contact adhesive based on natural rubber latex. For the shearing of soft- and hardboard, textiles, coconut, jute, felt, veneer.
Contents: 12 x 500 ml

Roberts 8200 Quick-Bond Spray glue R332



Defintion: A quick-bonding aerosol adhesive to glue carpet on porous and non-porous surfaces.
Contents: 12 x 340 ml

Cut-resistant spray 12 x 500 ml R5920A



Defintion: Quick-drying and transparent spray for making e.g. woven carpet etc. cut-resistant does not contain CFCs.
Contents: 12 x 500 ml

High Tack spraycan adhesive 12 x 500 ml R0023



Defintion: Spraycan adhesive High Tack contact adhesive in spraycan, based on synthetic rubber. With high initial adhesions, it is therefore extremely suitable for bonding furniture foams. Contains no harmful CFCs.
Contents: 12 x 500 ml

Spraycan adhesive 12 x 500 ml R0099



Defintion: Contact adhesive based on synthetic rubber, to be used for many purposes. Contains no harmful CFCs.
Contents: 12 x 500 ml

Construction adhesive Tack-ST R0024



Defintion: Extremely strong construction adhesive with unprecedented adhesion based on polymers with terminal silane. Suitable for bonding to all surfaces (absorbent and non-absorbent surfaces). Silicone and isocyanate free.

Contents: 20 x 290 ml

Carpet seam glue - 12 x 235 ml R8015 A



Defintion: Carpet seam adhesive without volatile organic compounds that dries transparently and can be easily removed with soap and water.

Contents: 12 x 235 ml

Roberts Snozzle Glue Applicator R10981



Defintion: The Roberts Snozzle glue applicator spreads 11 rows of glue at once. This ensures a flat, well-adhesive installation for professional results and minimal to no repairs. The nozzle fits most standard 11 oz. and 30 oz. cartridge pistols. The nozzle can be reused if it is cleaned after each use.

Contents: 25

Glue syringe 60 ml R10219



Defintion: Glue injection syringe 60 ml with 1 needle.

Contents: 1

Seam welding fluid tube 50 gr R109551



Defintion: For cold welding of seams in LVT floor covering.

Contents: 15

Superspray adhesive R0025



Defintion: Spray can glue for general use for fixing carpets, subfloors and tiles with felt and foam backs.

Contents: 12 x 500 ml

Double Stick Carpet Adhesive STK 900 R900



Defintion: STK900 is a solvent-free, versatile water-based synthetic latex adhesive that is easy to apply with the trowel and leaves no stains.

Contents: 15 kg

Water-based carpet adhesive STK950 R901



Defintion: STK950 is a permanent water-based carpet adhesive. Free of solvents and low odour.

Contents: 15 kg

Tapiton tapes collection

Are you looking for a suitable tape for the right application? In our extensive range you will find a suitable tape for the most common applications.

For example, if you are going to install carpet, LVT or vinyl, you need a tape that has good adhesive strength and guarantees stability. If a staircase needs to be covered, Tapiton STAIR tape is extremely suitable for securing the LVT or vinyl floor. This tape does not dry out and does not become brittle. You need the Tapiton Alu tape to attach moisture barriers to each other. This way you have the right tape for every job.



Tapiton Alu 50 mm x 25 m R50220



Defintion: Tapiton Alu is a vapor-proof alu tape for sealing PE moisture barrier and subfloors that are equipped with a moisture barrier.

Contents: 24 rolls

Tapiton Duct 50 mm x 50 m R50197



Defintion: Tapiton Duct is a universal high-quality, water-repellent duct tape. For packaging or securing products.

Contents: 24 rolls

Tapiton Excel carpet tape 100 mm x 50 m R50200



Defintion: Tapiton Excel is a double-sided carpet tape for the professional user. With this tape, even carpet can be secured to carpet. Provided with a polyester carrier to ensure stability. Easy to tear by hand.

Contents: 12 rolls

Tapiton Excel carpet tape 50 mm x 25 m R50198

Contents: 24 rolls

Tapiton Excel tapijt tape 50mm x 50 mtr R50199-MIH

Defintion:

Contents: 24 rollen

Tapiton Flex 50 mm x 25 m R50192



Defintion: Tapiton Flex is a high-quality double-sided carpet/vinyl tape for the professional user. Highly plasticizer resistant and therefore suitable for LVT, vinyl and carpet. Due to its polyester carrier, it is very dimensionally stable. Can be processed by hand. Can be processed on any desired subfloor.

Contents: 24 rolls

Tapiton Flex 50 mm x 10 m R50191

Contents: 36 rolls

Tapiton Paint 25 mm x 50 m R50195



Defintion: Tapiton Paint has a relatively high adhesive strength that should preferably be removed within 24 hours. This is to prevent any glue residue. Usable for painting and packaging work.

Contents: 36 rolls

Tapiton Stair 30 mm x 25 m R50188



Defintion: Tapiton Stair is extremely suitable for securing LVT stairs and skirting boards. Highly plasticizer resistant, suitable for LVT and vinyl. Tapiton Stair does not dry out or become brittle.

Contents: 18 rollen

Tapiton Stair 100 mm x 25 m R50190

Contents: 6 rolls

Tapiton Stair 60 mm x 25 m R50189

Contents: 9 rolls

Tapiton TSA 50 mm x 25 m R50194



Defintion: Tapiton TSA is a removable double-sided carpet tape. For temporarily securing the carpet. Ideal for trade fairs and events.

Contents: 36 rolls

Vapor-proof seams tape 48 mm x 30,5 m R50040



Defintion: Roberts vapor-tight seam tape is a multi-applicable tape for vapor-tight sealing of seams. Due to its extra reinforced support, it is extremely suitable for sealing underlayment plates and packaging applications.

Contents: 12 rolls

Tapiton Stair Supermount 240 mm x 25 m R50187



Defintion: Tapiton Stair Supermount is a tape for the professional user.

Contents: 2 rolls

Self-adhesive tape 75 mm x 25 m R50353



Defintion: The tape creates a vapor barrier and strengthens the seams of the subfloor.

Contents: 24 rolls

Premier Gold Heavy Duty DS Tape 50 mm x 50 m R50504



Defintion: A medium carpet tape with a thin film carrier and excellent adhesion and tension.

Contents: 5 rolls

Premier Silver tape 5 x 50 m R50505



Defintion: Flexible and comfortable on all floor surfaces.

Contents: 5 rolls

Premier Bronze Standard DS Tape 50 mm x 50 m R50506



Defintion: A medium carpet tape with a thin film carrier and excellent adhesion and tension.

Contents: 5 rolls

Mushroom Tape 50 mm x 25 m R50507



Defintion: The professional way to install felt carpet. Specially designed to hook and secure your carpet.

Contents: 10 rolls

Roberts profiles

The brand that stands for quality!


When installing a floor and an underlay, you also like to use the right tools, don't you? Each type of floor covering requires specialist tools. Estillon has professional Roberts tools and accessories in its range for all those different types of floor covering. A complete collection of floor installation tools, various types of tape, aluminum profiles, Smoothedge carpet slats and adhesives.

Roberts is an American brand of quality tools for the floor installer. Roy Roberts invented the carpet gripper and knee tensioner in 1938. After that, the range expands with more tools for carpet installation. For over 80 years, Roberts has been a premier brand of carpet installation tools, adhesives and accessories.




- Unique and modern colors: brushed nickel, matt gold, shiny gold, shiny silver and matte silver
- Profiles for every type of floor and finish
- Increases the life of the floor
- Easy to edit and install
- Unique Hotmelt tape: strongest possible bond

Heavy aluminium carpet closure edge matt silver 7,7 mm R8717



Type: coverstrip
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 3,55 cm
Height: 0,77 cm
Colour: aluminium
Assembly: drilled


Heavy aluminium carpet closure edge 9 mm R1806 / R1807 / R1813 / R1814 / R1815 / R1816 / R1817

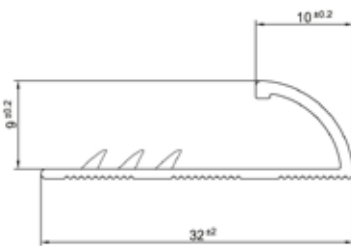

Type: coverstrip
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 3,55 cm
Height: 0,9 cm
Assembly: drilled/selfstick (S)

Heavy aluminium carpet 9 mm, matt gold R1806 (S)
 Heavy aluminium carpet 9 mm, matt silver R1807 (S)
 Heavy aluminium carpet 9 mm, bright gold hammered R1813 (S)
 Heavy aluminium carpet 9 mm, bright silver hammered R1814S
 Heavy aluminium carpet 9 mm, brushed nickel R1815 (S)
 Heavy aluminium carpet 9 mm, bright gold R1816 (S)
 Heavy aluminium carpet 9 mm, bright silver R1817 (S)


Heavy aluminium carpet closure 9 mm R1906 / R1907 / R1913 / R1914

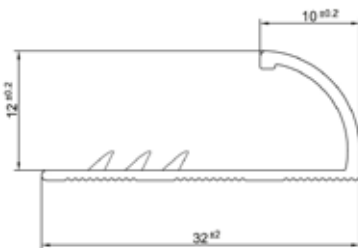

Type: coverstrip
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 3,55 cm
Height: 1,2 cm
Assembly: drilled/selfstick (S)


Heavy aluminium carpet 9 mm, matt gold R1906 (S)
 Heavy aluminium carpet 9 mm, matt silver R1907 (S)
 Heavy aluminium carpet 9 mm, bright gold hammered R1913 (S)
 Heavy aluminium carpet 9 mm, bright silver hammered R1914S

LVT inlay for stair nose 25 m x 25 mm R8222




Type: stair nosing profile
Contents: 1 x 25 m
Length: 25 m
Width: 2,5 cm
Height: 0,5 cm
Colour: black

Alu wall closing profile 21 x 15 mm, matt silver R6707S



Type: coverstrip
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 2,1 cm
Height: 1,5 cm
Colour: matt silver
Assembly: drilled


Alu vari-strip 7,5 mm R3806 / R3807 / R3816 / R3817



Type: coverstrip
Contents: 12 x 2,7 m = 32,4 m
Length: 2,7 m
Width: 2,8 cm
Height: 0,75 cm
Assembly: drilled/selfstick (S)

Alu vari-strip 7,5 mm, matt gold R3806 (S)
Alu vari-strip 7,5 mm, matt silver R3807 (S)
Alu vari-strip 7,5 mm, bright gold R3816S
Alu vari-strip 7,5 mm, bright silver R3817 (S)


Alu stair nosing profile 45 x 25 mm R6207 / R6215



Type: stair nosing profile
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 4,5 cm
Height: 2,5 cm
Assembly: drilled

Alu stair nosing profile 45 x 25 mm, matt silver R6207
Alu stair nosing profile 45 x 25 mm, brushed nickel R6215


Alu stair nosing profile 45 x 25 mm R6607 / R6615



Type: stair nosing profile
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 4,5 cm
Height: 0,15 cm
Assembly: drilled

Alu stair nosing profile 45 x 15 mm, matt silver R6607

Alu stair nosing profile 28 x 12 x 2,5 mm R6407 / R6415

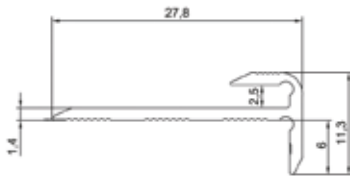

Type: stair nosing profile

Contents: 12 x 2,70 m = 32,4 m

Length: 2,7 m

Width: 2,8 cm


Height: 1,2 cm

Assembly: drilled

Alu stair nosing profile 28 x 12 x 2,5 mm, for LVT, matt silver R6407

Alu stair nosing profile 28 x 12 x 2,5 mm, for LVT, brushed nickel R6415

LVT insert for stair nosing profile R6207/R6215-R6607/R6615 R666393



Type: Stair nosing profile

Contents: 20 x 2,70 m = 32,4 m


Length: 2,7 m

Width: 4,4 cm

Height: 1,2 cm

Colour: black

Alu transition profile 40 mm R4306 / R4307 / R4315 / R4316 / R4317



Type: transition profile

Contents: 12 x 2,7 m = 32,4 m

Length: 2,7 m

Width: 4 cm

Height: 0,75 cm

Assembly: selfstick

Transition profile 40 mm, matt gold R4306S


Transition profile 40 mm, matt silver R4307S

Transition profile 40 mm, brushed nickel R4315S

Transition profile 40 mm, bright gold R4316S


Transition profile 40 mm, bright silver R4317S

Alu seam cover strip matt gold R8616

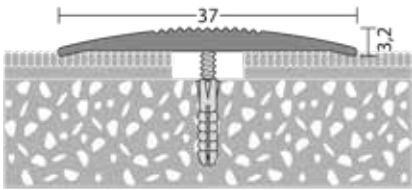

Type: transition profile
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 3,7 cm
Height: 0,32 cm
Colour: matt gold
Assembly: drilled

Alu seam cover strip 37 mm self-adhesive R5407S / R5406S / R5417S / R5416 S/ R5415S



Type: transition profile
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 4 cm
Height: 0,75 cm
Assembly: selfstick


Alu seam cover strip 37 mm self-adhesive, matt silver R5407S

Alu seam cover strip 37 mm self-adhesive, bright silver R5417S

Alu seam cover strip 37 mm self-adhesive, bright gold R5416S


Alu seam cover strip 37 mm self-adhesive, brushed nickel R5415S

Alu lino coverstrip matt gold 4 mm R8016

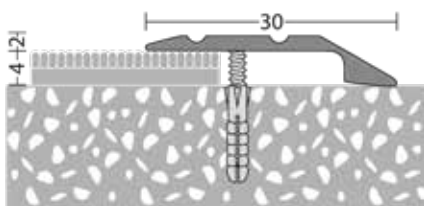


Type: coverstrip
Contents: 12 x 2,70 m = 32,4 m
Length: 2,7 m
Width: 3 cm
Height: 0,40 cm
Colour: matt gold
Assembly: drilled

Alu double strip with hood matt silver 7,5 mm R8917



Type: transition profile
Contents: 6 x 2,70 m = 16,2 m
Length: 2,7 m
Width: 2,5 cm
Height: 0,75 cm
Colour: matt silver
Assembly: drilled

Alu double strip with hood 7,7 mm R3707(S)/ R3706(S) / R3717(S) / R3716S / R3715(S)



Type: transition profile
Contents: 6 x 2,70 m = 16,2 m
Length: 2,7 m
Width: 2,5 cm
Height: 0,77 cm
Assembly: drilled / selfstick

Alu double strip with hood 7,7 mm matt silver R3707 (S)


Alu double strip with hood 7,7 mm matt gold R3706 (S)

Alu double strip with hood 7,7 mm bright silver R3717 (S)

Alu double strip with hood 7,7 mm bright gold R3716S

Alu double strip with hood 7,7 mm brushed nickel R3715 (S)

Karpetedge 0900

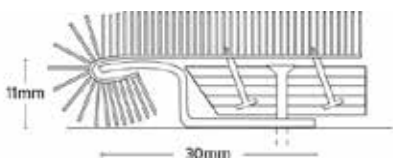

Type: In combination with the carpet gripper, Karpetedge ensures a perfect roll edge finish of the carpet on flat surfaces in areas with little traffic.

Contents: 10 x 1,21 m = 12,1 m

Length: 1,21 m

Width: 3,0 cm

Height: 1,1 cm

Colour: aluminium

Support



Because there is much more to tell about underlays, we present a new video every month. It covers various topics from the flooring industry. So for the best up-to-date information on all things about flooring, be sure to subscribe to our Youtube channel!

In addition to our YouTube channel, we also like to keep you informed about our latest products and innovations in other ways. We do this through our Estillon.com site, monthly newsletters, messages on social media and press releases.

In addition, we send the “Estillon informs” mailing once a quarter. Here you will find all new photos, videos, info sheets and technical data sheets. You can also easily find the technical data sheets on the website. Our customer service team is ready to translate your wishes and needs into a concrete solution.

Everything with the aim of improving the floor. Feel free to contact us.

We will improve your floor.

estillon

Estillon B.V.

Linie 25

5405 AR Uden

The Netherlands

T +31 (0)413 / 42 74 27

F +31 (0)413 / 42 74 28

E info@estillon.nl

I www.estillon.com



Estillon GmbH

Fössestraße 77 c

30451 Hannover

Germany

T +49 (0)511 / 353639-38

F +49 (0)511 / 353639-37

E info@estillon.de

I www.estillon.de

Estillon S.A.R.L.

64 Rue Claude Chappe

78370 Plaisir

France

T +33 (0)1 30 54 23 46

F +33 (0)1 30 54 06 29

E info@estillon.fr

I www.estillon.fr